

# VG1000 Series Flanged Ball Valves

## Product Bulletin


VG1xA5x

Code No. LIT-12011228  
Issued October 2017

Refer to the [QuickLIT website](#) for the most up-to-date version of this document.

The VG1000 Series Flanged Ball Valves are primarily designed to regulate the flow of hot water, chilled water, and 50/50 glycol solutions to the demand of a controller in HVAC systems. The valves come in sizes of 2-1/2, 3, 4, 5, and 6 in. These American Society of Mechanical Engineers (ASME) Class 150 flanged valves come in both two- and three-way configurations. Johnson Controls offers valve, linkage, and actuator assemblies for factory or field mounting with either spring return or non-spring return actuators.

**Figure 1: VG1000 Series Ball Valves Shown with Field Mounted M9000 Series Actuators**

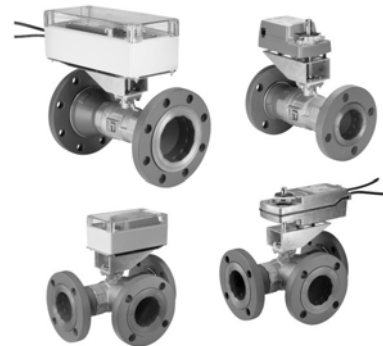

**Table 1: Features and Benefits**

Features	Benefits
<b>Closeoff Pressure Rating:</b> <ul style="list-style-type: none"> <li>• 100 psi for Two-Way Valves</li> <li>• 50 psi for Three-Way Valves</li> </ul>	Provides tight shutoff.
<b>300 Stainless Steel Ball and Stem Assembly</b>	Applies to systems with high temperature water (0 to 284°F [-18 to 140°C]) or 25 psi saturated steam.
<b>500:1 Rangeability</b>	Provides accurate control under all load conditions.
<b>Amodel® Flow Characterizing Disk</b>	Provides equal percentage flow characteristics for best temperature control; available in a wide array of Cv ranges to cover a broad variety of applications.
<b>Ethylene Propylene Diene Monomer (EPDM) Double O-Ring Stem Seal</b>	Offers tested leak-free operation for 200,000 cycles in iron-oxide contaminated water.
<b>Graphite-Reinforced Polytetrafluoroethylene (PTFE) Seats</b>	Include 15% graphite-reinforced ball seals that last twice as long in iron-oxide contaminated water when compared to virgin Teflon® ball seats.
<b>PTFE Thermal Spacer</b>	Provides thermal isolation between the actuator and the valve.
<b>Seats Backed with EPDM O-Rings</b>	Maintain a constant seating force that compensates for expansion, contraction, and seat wear without increasing operating torque.
<b>Maintenance-Free Design</b>	Performs without failure in excess of 200,000 full stroke cycles in iron-oxide contaminated water.
<b>Available with Factory-Mounted M9124 or M9220 Series Electric Actuators</b>	Reduces field installation time and cost.
<b>M9000-330 and M9000-340 Weathershields Available for Field Installation</b>	Protect the actuator from corrosion, rain, freezing rain, sleet, and snow.

# Ordering Information

**Table 2: Ordering Data**

V		G		Valve Global																								
1	2	1	3	Product Family											1 = Forged Brass Ball Valve													
		2	4	Body Type and Flow Characteristic											2 = Two-Way, with Equal Percentage Flow Characteristics 8 = Three-Way Mixing with Equal Percentage In-line Port Flow Characteristics and Linear Angle Port Flow Characteristics													
		A	5	Flange Type											A = ASME Class 150													
			5	Trim											5 = Stainless Steel Ball and Stem, 300 Series													
				G	S	Size and Maximum Cv										Size	Control Disk	Control Port Cv (kv)	Bypass Port Cv (kv) (Three-Way Only)									
				7	8											GS = 2-1/2 in. (DN65), large face-to-face	Yes	47 (40)	29 (25)									
																GT = 2-1/2 in. (DN65), large face-to-face	Yes	74 (63)	47 (40)									
																GU = 2-1/2 in. (DN65), large face-to-face	Yes	117 (100)	74 (63)									
																KS = 2-1/2 in. (DN65), narrow face-to-face	Yes	47 (40)	29 (25)									
																KT = 2-1/2 in. (DN65), narrow face-to-face	Yes	74 (63)	47 (40)									
																KU = 2-1/2 in. (DN65), narrow face-to-face	Yes	117 (100)	74 (63)									
																HT = 3 in. (DN80), large face-to-face	Yes	74 (63)	47 (40)									
																HU = 3 in. (DN80), large face-to-face	Yes	117 (100)	74 (63)									
																HV = 3 in. (DN80), large face-to-face	Yes	176 (150)	88 (75)									
																HW = 3 in. (DN80), large face-to-face	No	211 (180)	105 (90)									
																LT = 3 in. (DN80), narrow face-to-face	Yes	74 (63)	47 (40)									
																LU = 3 in. (DN80), narrow face-to-face	Yes	117 (100)	74 (63)									
																LV = 3 in. (DN80), narrow face-to-face	Yes	176 (150)	88 (75)									
																LW = 3 in. (DN80), narrow face-to-face	No	211 (180)	105 (90)									
																JU = 4 in. (DN100), large face-to-face	Yes	117 (100)	74 (63)									
																JV = 4 in. (DN100), large face-to-face	No	176 (150)	88 (75)									
																MW = 4 in. (DN100), narrow face-to-face	Yes	190 (164)	190 (164)									
																NY = 5 in. (DN125), narrow face-to-face	Yes	290 (251)	190 (164)									
																PZ = 6 in. (DN150), narrow face-to-face	Yes	350 (303)	180 (156)									
							+	Actuator Mounting										+ = Factory-Mounted Actuator (Leave Fields 9 through 15 blank for valve without factory-mounted actuator)										
							9		2	N	Actuator Type (Refer to Actuator Bulletin)										924 = M9124-xGx-2 Non-Spring Return 92N = M9220-xxx-3 Spring Opens 94N = M9220-xxx-3 Spring Closes							
												G	Control Type										A = Floating, AC 24 V or DC 24 V Input B = On/Off G = Proportional: DC 0 (2) to 10 V or 0 (4) to 20 mA with field-furnished 500 ohm resistor					
													G	Supply Voltage										A = AC 120 V M9220-BAX-3 Only G = AC 24 V				
														C	Auxiliary Switch										A = No Auxiliary Switch (all Models) C = Two Auxiliary Switches			
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	= Field													
V	G	1	2	A	5	G	S	+	9	2	N	G	G	C														
Valve								+ Actuator																				

Example: Ball valve, 2-1/2 in. (DN65), 47 Cv two-way, ASME Class 150 Flange, stainless steel trim, with factory-mounted M9220-GGC-3 actuator, proportional (prop.) control, AC 24 V supply, with feedback and two-way auxiliary switches.

**Table 3: Flanged Stainless Steel Trim Ball Valves with Non-Spring Return Electric Actuators**

Valve	Size, in.	Cv	Closeoff PSIG	AC 24 V			
				Without Switches		With Two Auxiliary Switches	
				On/Off (Floating)	DC 0 to 10 V Prop.	On/Off (Floating)	DC 0 to 10 V Prop.
				M9124-AGA-2	M9124-GGA-2	M9124-AGC-2	M9124-GGC-2
<b>Two-Way – Non-Spring Return</b>							
VG12A5GS	2-1/2	47	100	VG12A5GS+924AGA	VG12A5GS+924GGA	VG12A5GS+924AGC	VG12A5GS+924GGC
VG12A5KS		74		VG12A5KS+924AGA	VG12A5KS+924GGA	VG12A5KS+924AGC	VG12A5KS+924GGC
VG12A5GT				VG12A5GT+924AGA	VG12A5GT+924GGA	VG12A5GT+924AGC	VG12A5GT+924GGC
VG12A5KT				VG12A5KT+924AGA	VG12A5KT+924GGA	VG12A5KT+924AGC	VG12A5KT+924GGC
VG12A5GU		117		VG12A5GU+924AGA	VG12A5GU+924GGA	VG12A5GU+924AGC	VG12A5GU+924GGC
VG12A5KU				VG12A5KU+924AGA	VG12A5KU+924GGA	VG12A5KU+924AGC	VG12A5KU+924GGC
VG12A5HT	3	74	100	VG12A5HT+924AGA	VG12A5HT+924GGA	VG12A5HT+924AGC	VG12A5HT+924GGC
VG12A5LT		117		VG12A5LT+924AGA	VG12A5LT+924GGA	VG12A5LT+924AGC	VG12A5LT+924GGC
VG12A5HU				VG12A5HU+924AGA	VG12A5HU+924GGA	VG12A5HU+924AGC	VG12A5HU+924GGC
VG12A5LU				VG12A5LU+924AGA	VG12A5LU+924GGA	VG12A5LU+924AGC	VG12A5LU+924GGC
VG12A5HV		176		VG12A5HV+924AGA	VG12A5HV+924GGA	VG12A5HV+924AGC	VG12A5HV+924GGC
VG12A5LV				VG12A5LV+924AGA	VG12A5LV+924GGA	VG12A5LV+924AGC	VG12A5LV+924GGC
VG12A5HW		211		VG12A5HW+924AGA	VG12A5HW+924GGA	VG12A5HW+924AGC	VG12A5HW+924GGC
VG12A5LW				VG12A5LW+924AGA	VG12A5LW+924GGA	VG12A5LW+924AGC	VG12A5LW+924GGC
VG12A5JU		4		117	100	VG12A5JU+924AGA	VG12A5JU+924GGA
VG12A5JV	176		VG12A5JV+924AGA	VG12A5JV+924GGA		VG12A5JV+924AGC	VG12A5JV+924GGC
VG12A5MW	190		VG12A5MW+924AGA	VG12A5MW+924GGA		VG12A5MW+924AGC	VG12A5MW+924GGC
VG12A5NY	5	290		VG12A5NY+924AGA	VG12A5NY+924GGA	VG12A5NY+924AGC	VG12A5NY+924GGC
VG12A5PZ	6	350		VG12A5PZ+924AGA	VG12A5PZ+924GGA	VG12A5PZ+924AGC	VG12A5PZ+924GGC
<b>Three-Way – Non-Spring Return</b>							
VG18A5GS	2-1/2	47 / 29	50	VG18A5GS+924AGA	VG18A5GS+924GGA	VG18A5GS+924AGC	VG18A5GS+924GGC
VG18A5KS		74 / 47		VG18A5KS+924AGA	VG18A5KS+924GGA	VG18A5KS+924AGC	VG18A5KS+924GGC
VG18A5GT				VG18A5GT+924AGA	VG18A5GT+924GGA	VG18A5GT+924AGC	VG18A5GT+924GGC
VG18A5KT				VG18A5KT+924AGA	VG18A5KT+924GGA	VG18A5KT+924AGC	VG18A5KT+924GGC
VG18A5GU		117 / 74		VG18A5GU+924AGA	VG18A5GU+924GGA	VG18A5GU+924AGC	VG18A5GU+924GGC
VG18A5KU				VG18A5KU+924AGA	VG18A5KU+924GGA	VG18A5KU+924AGC	VG18A5KU+924GGC
VG18A5HT	3	74 / 47	50	VG18A5HT+924AGA	VG18A5HT+924GGA	VG18A5HT+924AGC	VG18A5HT+924GGC
VG18A5LT		117 / 74		VG18A5LT+924AGA	VG18A5LT+924GGA	VG18A5LT+924AGC	VG18A5LT+924GGC
VG18A5HU				VG18A5HU+924AGA	VG18A5HU+924GGA	VG18A5HU+924AGC	VG18A5HU+924GGC
VG18A5LU				VG18A5LU+924AGA	VG18A5LU+924GGA	VG18A5LU+924AGC	VG18A5LU+924GGC
VG18A5HV		176 / 88		VG18A5HV+924AGA	VG18A5HV+924GGA	VG18A5HV+924AGC	VG18A5HV+924GGC
VG18A5LV				VG18A5LV+924AGA	VG18A5LV+924GGA	VG18A5LV+924AGC	VG18A5LV+924GGC
VG18A5HW		211 / 105		VG18A5HW+924AGA	VG18A5HW+924GGA	VG18A5HW+924AGC	VG18A5HW+924GGC
VG18A5LW				VG18A5LW+924AGA	VG18A5LW+924GGA	VG18A5LW+924AGC	VG18A5LW+924GGC
VG18A5JU		4		117 / 74	50	VG18A5JU+924AGA	VG18A5JU+924GGA
VG18A5JV	176 / 88		VG18A5JV+924AGA	VG18A5JV+924GGA		VG18A5JV+924AGC	VG18A5JV+924GGC
VG18A5MW	190 / 190		VG18A5MW+924AGA	VG18A5MW+924GGA		VG18A5MW+924AGC	VG18A5MW+924GGC
VG18A5NY	5	290 / 190		VG18A5NY+924AGA	VG18A5NY+924GGA	VG18A5NY+924AGC	VG18A5NY+924GGC
VG18A5PZ	6	350 / 180		VG18A5PZ+924AGA	VG18A5PZ+924GGA	VG18A5PZ+924AGC	VG18A5PZ+924GGC

**Table 4: Flanged Stainless Steel Trim Ball Valves with Spring Return Electric Actuators without Switches (Part 1 of 3)**

Valve	Size, in.	Cv	Closeoff PSIG	AC 24 V			AC 120 V
				Floating	DC 0 to 10 V Prop.	On/Off	On/Off
				M9220-AGA-3	M9220-GGA-3	M9220-BGA-3	M9220-BAA-3
<b>Two-Way – Spring Return – Valve Open (Normally Open) – without Switches</b>							
VG12A5GS	2-1/2	47	100	VG12A5GS+92NAGA	VG12A5GS+92NGGA	VG12A5GS+92NBGA	VG12A5GS+92NBAA
VG12A5KS		74		VG12A5KS+92NAGA	VG12A5KS+92NGGA	VG12A5KS+92NBGA	VG12A5KS+92NBAA
VG12A5GT				VG12A5GT+92NAGA	VG12A5GT+92NGGA	VG12A5GT+92NBGA	VG12A5GT+92NBAA
VG12A5KT		117		VG12A5KT+92NAGA	VG12A5KT+92NGGA	VG12A5KT+92NBGA	VG12A5KT+92NBAA
VG12A5GU				VG12A5GU+92NAGA	VG12A5GU+92NGGA	VG12A5GU+92NBGA	VG12A5GU+92NBAA
VG12A5KU				VG12A5KU+92NAGA	VG12A5KU+92NGGA	VG12A5KU+92NBGA	VG12A5KU+92NBAA
VG12A5HT	3		74	100	VG12A5HT+92NAGA	VG12A5HT+92NGGA	VG12A5HT+92NBGA
VG12A5LT		117	VG12A5LT+92NAGA		VG12A5LT+92NGGA	VG12A5LT+92NBGA	VG12A5LT+92NBAA
VG12A5HU			VG12A5HU+92NAGA		VG12A5HU+92NGGA	VG12A5HU+92NBGA	VG12A5HU+92NBAA
VG12A5LU		176	VG12A5LU+92NAGA		VG12A5LU+92NGGA	VG12A5LU+92NBGA	VG12A5LU+92NBAA
VG12A5HV			VG12A5HV+92NAGA		VG12A5HV+92NGGA	VG12A5HV+92NBGA	VG12A5HV+92NBAA
VG12A5LV			VG12A5LV+92NAGA		VG12A5LV+92NGGA	VG12A5LV+92NBGA	VG12A5LV+92NBAA
VG12A5HW			211		VG12A5HW+92NAGA	VG12A5HW+92NGGA	VG12A5HW+92NBGA
VG12A5LW		VG12A5LW+92NAGA			VG12A5LW+92NGGA	VG12A5LW+92NBGA	VG12A5LW+92NBAA
VG12A5JU	4	117	100	VG12A5JU+92NAGA	VG12A5JU+92NGGA	VG12A5JU+92NBGA	VG12A5JU+92NBAA
VG12A5JV		176		VG12A5JV+92NAGA	VG12A5JV+92NGGA	VG12A5JV+92NBGA	VG12A5JV+92NBAA
VG12A5MW		190		VG12A5MW+92NAGA	VG12A5MW+92NGGA	VG12A5MW+92NBGA	VG12A5MW+92NBAA
VG12A5NY	5	290		VG12A5NY+92NAGA	VG12A5NY+92NGGA	VG12A5NY+92NBGA	VG12A5NY+92NBAA
VG12A5PZ	6	350		VG12A5PZ+92NAGA	VG12A5PZ+92NGGA	VG12A5PZ+92NBGA	VG12A5PZ+92NBAA

**Table 4: Flanged Stainless Steel Trim Ball Valves with Spring Return Electric Actuators without Switches (Part 2 of 3)**

Valve	Size, in.	Cv	Closeoff PSIG	AC 24 V			AC 120 V	
				Floating	DC 0 to 10 V Prop.	On/Off	On/Off	
				M9220-AGA-3	M9220-GGA-3	M9220-BGA-3	M9220-BAA-3	
<b>Two-Way – Spring Return – Valve Closed (Normally Closed) – without Switches</b>								
VG12A5GS	2-1/2	47	100	VG12A5GS+94NAGA	VG12A5GS+94NGGA	VG12A5GS+94NBGA	VG12A5GS+94NBAA	
VG12A5KS		74		VG12A5KS+94NAGA	VG12A5KS+94NGGA	VG12A5KS+94NBGA	VG12A5KS+94NBAA	
VG12A5GT				VG12A5GT+94NAGA	VG12A5GT+94NGGA	VG12A5GT+94NBGA	VG12A5GT+94NBAA	
VG12A5KT		117		VG12A5KT+94NAGA	VG12A5KT+94NGGA	VG12A5KT+94NBGA	VG12A5KT+94NBAA	
VG12A5GU				VG12A5GU+94NAGA	VG12A5GU+94NGGA	VG12A5GU+94NBGA	VG12A5GU+94NBAA	
VG12A5KU				VG12A5KU+94NAGA	VG12A5KU+94NGGA	VG12A5KU+94NBGA	VG12A5KU+94NBAA	
VG12A5HT	3		74	100	VG12A5HT+94NAGA	VG12A5HT+94NGGA	VG12A5HT+94NBGA	VG12A5HT+94NBAA
VG12A5LT		117	VG12A5LT+94NAGA		VG12A5LT+94NGGA	VG12A5LT+94NBGA	VG12A5LT+94NBAA	
VG12A5HU			VG12A5HU+94NAGA		VG12A5HU+94NGGA	VG12A5HU+94NBGA	VG12A5HU+94NBAA	
VG12A5LU		176	VG12A5LU+94NAGA		VG12A5LU+94NGGA	VG12A5LU+94NBGA	VG12A5LU+94NBAA	
VG12A5HV			VG12A5HV+94NAGA		VG12A5HV+94NGGA	VG12A5HV+94NBGA	VG12A5HV+94NBAA	
VG12A5LV			211		VG12A5LV+94NAGA	VG12A5LV+94NGGA	VG12A5LV+94NBGA	VG12A5LV+94NBAA
VG12A5HW					VG12A5HW+94NAGA	VG12A5HW+94NGGA	VG12A5HW+94NBGA	VG12A5HW+94NBAA
VG12A5LW		VG12A5LW+94NAGA	VG12A5LW+94NGGA		VG12A5LW+94NBGA	VG12A5LW+94NBAA		
VG12A5JU	4	117	100	VG12A5JU+94NAGA	VG12A5JU+94NGGA	VG12A5JU+94NBGA	VG12A5JU+94NBAA	
VG12A5JV		176		VG12A5JV+94NAGA	VG12A5JV+94NGGA	VG12A5JV+94NBGA	VG12A5JV+94NBAA	
VG12A5MW		190		VG12A5MW+94NAGA	VG12A5MW+94NGGA	VG12A5MW+94NBGA	VG12A5MW+94NBAA	
VG12A5NY	5	290		VG12A5NY+94NAGA	VG12A5NY+94NGGA	VG12A5NY+94NBGA	VG12A5NY+94NBAA	
VG12A5PZ	6	350		VG12A5PZ+94NAGA	VG12A5PZ+94NGGA	VG12A5PZ+94NBGA	VG12A5PZ+94NBAA	
<b>Three-Way – Spring Return Counterclockwise – Port A (Coil) Open to Port AB (Common) – without Switches</b>								
VG18A5GS	2-1/2	47 / 29	50	VG18A5GS+92NAGA	VG18A5GS+92NGGA	VG18A5GS+92NBGA	VG18A5GS+92NBAA	
VG18A5K		74 / 47		VG18A5KS+92NAGA	VG18A5KS+92NGGA	VG18A5KS+92NBGA	VG18A5KS+92NBAA	
VG18A5GT				VG18A5GT+92NAGA	VG18A5GT+92NGGA	VG18A5GT+92NBGA	VG18A5GT+92NBAA	
VG18A5KT		117 / 74		VG18A5KT+92NAGA	VG18A5KT+92NGGA	VG18A5KT+92NBGA	VG18A5KT+92NBAA	
VG18A5GU				VG18A5GU+92NAGA	VG18A5GU+92NGGA	VG18A5GU+92NBGA	VG18A5GU+92NBAA	
VG18A5KU				VG18A5KU+92NAGA	VG18A5KU+92NGGA	VG18A5KU+92NBGA	VG18A5KU+92NBAA	
VG18A5HT	3		74 / 47	50	VG18A5HT+92NAGA	VG18A5HT+92NGGA	VG18A5HT+92NBGA	VG18A5HT+92NBAA
VG18A5LT		117 / 74	VG18A5LT+92NAGA		VG18A5LT+92NGGA	VG18A5LT+92NBGA	VG18A5LT+92NBAA	
VG18A5HU			VG18A5HU+92NAGA		VG18A5HU+92NGGA	VG18A5HU+92NBGA	VG18A5HU+92NBAA	
VG18A5LU		176 / 88	VG18A5LU+92NAGA		VG18A5LU+92NGGA	VG18A5LU+92NBGA	VG18A5LU+92NBAA	
VG18A5HV			VG18A5HV+92NAGA		VG18A5HV+92NGGA	VG18A5HV+92NBGA	VG18A5HV+92NBAA	
VG18A5LV			211 / 105		VG18A5LV+92NAGA	VG18A5LV+92NGGA	VG18A5LV+92NBGA	VG18A5LV+92NBAA
VG18A5HW					VG18A5HW+92NAGA	VG18A5HW+92NGGA	VG18A5HW+92NBGA	VG18A5HW+92NBAA
VG18A5LW		VG18A5LW+92NAGA	VG18A5LW+92NGGA		VG18A5LW+92NBGA	VG18A5LW+92NBAA		
VG18A5JU	4	117 / 74	50	VG18A5JU+92NAGA	VG18A5JU+92NGGA	VG18A5JU+92NBGA	VG18A5JU+92NBAA	
VG18A5JV		176 / 88		VG18A5JV+92NAGA	VG18A5JV+92NGGA	VG18A5JV+92NBGA	VG18A5JV+92NBAA	
VG18A5MW		190 / 190		VG18A5MW+92NAGA	VG18A5MW+92NGGA	VG18A5MW+92NBGA	VG18A5MW+92NBAA	
VG18A5NY	5	290 / 190		VG18A5NY+92NAGA	VG18A5NY+92NGGA	VG18A5NY+92NBGA	VG18A5NY+92NBAA	
VG18A5PZ	6	350 / 180		VG18A5PZ+92NAGA	VG18A5PZ+92NGGA	VG18A5PZ+92NBGA	VG18A5PZ+92NBAA	

**Table 4: Flanged Stainless Steel Trim Ball Valves with Spring Return Electric Actuators without Switches (Part 3 of 3)**

Valve	Size, in.	Cv	Closeoff PSIG	AC 24 V			AC 120 V
				Floating	DC 0 to 10 V Prop.	On/Off	On/Off
				M9220-AGA-3	M9220-GGA-3	M9220-BGA-3	M9220-BAA-3
<b>Three-Way – Spring Return Clockwise – Port B (Bypass) Open to Port AB (Common) – without Switches</b>							
VG18A5GS	2-1/2	47 / 29	50	VG18A5GS+94NAGA	VG18A5GS+94NGGA	VG18A5GS+94NBGA	VG18A5GS+94NBAA
VG18A5KS				VG18A5KS+94NAGA	VG18A5KS+94NGGA	VG18A5KS+94NBGA	VG18A5KS+94NBAA
VG18A5GT		74 / 47		VG18A5GT+94NAGA	VG18A5GT+94NGGA	VG18A5GT+94NBGA	VG18A5GT+94NBAA
VG18A5KT				VG18A5KT+94NAGA	VG18A5KT+94NGGA	VG18A5KT+94NBGA	VG18A5KT+94NBAA
VG18A5GU		117 / 74		VG18A5GU+94NAGA	VG18A5GU+94NGGA	VG18A5GU+94NBGA	VG18A5GU+94NBAA
VG18A5KU				VG18A5KU+94NAGA	VG18A5KU+94NGGA	VG18A5KU+94NBGA	VG18A5KU+94NBAA
VG18A5HT	3	74 / 47	50	VG18A5HT+94NAGA	VG18A5HT+94NGGA	VG18A5HT+94NBGA	VG18A5HT+94NBAA
VG18A5LT				VG18A5LT+94NAGA	VG18A5LT+94NGGA	VG18A5LT+94NBGA	VG18A5LT+94NBAA
VG18A5HU		117 / 74		VG18A5HU+94NAGA	VG18A5HU+94NGGA	VG18A5HU+94NBGA	VG18A5HU+94NBAA
VG18A5LU				VG18A5LU+94NAGA	VG18A5LU+94NGGA	VG18A5LU+94NBGA	VG18A5LU+94NBAA
VG18A5HV		176 / 88		VG18A5HV+94NAGA	VG18A5HV+94NGGA	VG18A5HV+94NBGA	VG18A5HV+94NBAA
VG18A5LV				VG18A5LV+94NAGA	VG18A5LV+94NGGA	VG18A5LV+94NBGA	VG18A5LV+94NBAA
VG18A5HW		211 / 105		VG18A5HW+94NAGA	VG18A5HW+94NGGA	VG18A5HW+94NBGA	VG18A5HW+94NBAA
VG18A5LW				VG18A5LW+94NAGA	VG18A5LW+94NGGA	VG18A5LW+94NBGA	VG18A5LW+94NBAA
VG18A5JU	4	117 / 74	50	VG18A5JU+94NAGA	VG18A5JU+94NGGA	VG18A5JU+94NBGA	VG18A5JU+94NBAA
VG18A5JV		176 / 88		VG18A5JV+94NAGA	VG18A5JV+94NGGA	VG18A5JV+94NBGA	VG18A5JV+94NBAA
VG18A5MW		190 / 190		VG18A5MW+94NAGA	VG18A5MW+94NGGA	VG18A5MW+94NBGA	VG18A5MW+94NBAA
VG18A5NY	5	290 / 190		VG18A5NY+94NAGA	VG18A5NY+94NGGA	VG18A5NY+94NBGA	VG18A5NY+94NBAA
VG18A5PZ	6	350 / 180		VG18A5PZ+94NAGA	VG18A5PZ+94NGGA	VG18A5PZ+94NBGA	VG18A5PZ+94NBAA

**Table 5: Flanged Stainless Steel Trim Ball Valves with Spring Return Electric Actuators with Two Switches (Part 1 of 3)**

Valve	Size, in.	Cv	Closeoff PSIG	AC 24 V			AC 120 V
				Floating	DC 0 to 10 V Prop.	On/Off	On/Off
				M9220-AGC-3	M9220-GGC-3	M9220-BGC-3	M9220-BAC-3
<b>Two-Way – Spring Return – Valve Open (Normally Open) – with Two Auxiliary Switches</b>							
VG12A5GS	2-1/2	47	100	VG12A5GS+92NAGC	VG12A5GS+92NGGC	VG12A5GS+92NBGC	VG12A5GS+92NBAC
VG12A5KS		74		VG12A5KS+92NAGC	VG12A5KS+92NGGC	VG12A5KS+92NBGC	VG12A5KS+92NBAC
VG12A5GT				VG12A5GT+92NAGC	VG12A5GT+92NGGC	VG12A5GT+92NBGC	VG12A5GT+92NBAC
VG12A5KT		117		VG12A5KT+92NAGC	VG12A5KT+92NGGC	VG12A5KT+92NBGC	VG12A5KT+92NBAC
VG12A5GU				VG12A5GU+92NAGC	VG12A5GU+92NGGC	VG12A5GU+92NBGC	VG12A5GU+92NBAC
VG12A5KU		VG12A5KU+92NAGC		VG12A5KU+92NGGC	VG12A5KU+92NBGC	VG12A5KU+92NBAC	
VG12A5HT	3	74	100	VG12A5HT+92NAGC	VG12A5HT+92NGGC	VG12A5HT+92NBGC	VG12A5HT+92NBAC
VG12A5LT				VG12A5LT+92NAGC	VG12A5LT+92NGGC	VG12A5LT+92NBGC	VG12A5LT+92NBAC
VG12A5HU		117		VG12A5HU+92NAGC	VG12A5HU+92NGGC	VG12A5HU+92NBGC	VG12A5HU+92NBAC
VG12A5LU				VG12A5LU+92NAGC	VG12A5LU+92NGGC	VG12A5LU+92NBGC	VG12A5LU+92NBAC
VG12A5HV		176		VG12A5HV+92NAGC	VG12A5HV+92NGGC	VG12A5HV+92NBGC	VG12A5HV+92NBAC
VG12A5LV				VG12A5LV+92NAGC	VG12A5LV+92NGGC	VG12A5LV+92NBGC	VG12A5LV+92NBAC
VG12A5HW		211		VG12A5HW+92NAGC	VG12A5HW+92NGGC	VG12A5HW+92NBGC	VG12A5HW+92NBAC
VG12A5LW				VG12A5LW+92NAGC	VG12A5LW+92NGGC	VG12A5LW+92NBGC	VG12A5LW+92NBAC

**Table 5: Flanged Stainless Steel Trim Ball Valves with Spring Return Electric Actuators with Two Switches (Part 2 of 3)**

Valve	Size, in.	Cv	Closeoff PSIG	AC 24 V			AC 120 V
				Floating	DC 0 to 10 V Prop.	On/Off	On/Off
				M9220-AGC-3	M9220-GGC-3	M9220-BGC-3	M9220-BAC-3
VG12A5JU	4	117	100	VG12A5JU+92NAGC	VG12A5JU+92NGGC	VG12A5JU+92NBGC	VG12A5JU+92NBAC
VG12A5JV		176		VG12A5JV+92NAGC	VG12A5JV+92NGGC	VG12A5JV+92NBGC	VG12A5JV+92NBAC
VG12A5MW		190		VG12A5MW+92NAGC	VG12A5MW+92NGGC	VG12A5MW+92NBGC	VG12A5MW+92NBAC
VG12A5NY	5	290		VG12A5NY+92NAGC	VG12A5NY+92NGGC	VG12A5NY+92NBGC	VG12A5NY+92NBAC
VG12A5PZ	6	350		VG12A5PZ+92NAGC	VG12A5PZ+92NGGC	VG12A5PZ+92NBGC	VG12A5PZ+92NBAC
<b>Two-Way – Spring Return – Valve Closed (Normally Closed) – with Two Auxiliary Switches</b>							
VG12A5GS	2-1/2	47	100	VG12A5GS+94NAGC	VG12A5GS+94NGGC	VG12A5GS+94NBGC	VG12A5GS+94NBAC
VG12A5KS				VG12A5KS+94NAGC	VG12A5KS+94NGGC	VG12A5KS+94NBGC	VG12A5KS+94NBAC
VG12A5GT				74	VG12A5GT+94NAGC	VG12A5GT+94NGGC	VG12A5GT+94NBGC
VG12A5KT		VG12A5KT+94NAGC			VG12A5KT+94NGGC	VG12A5KT+94NBGC	VG12A5KT+94NBAC
VG12A5GU		117		VG12A5GU+94NAGC	VG12A5GU+94NGGC	VG12A5GU+94NBGC	VG12A5GU+94NBAC
VG12A5KU				VG12A5KU+94NAGC	VG12A5KU+94NGGC	VG12A5KU+94NBGC	VG12A5KU+94NBAC
VG12A5HT	3	74	100	VG12A5HT+94NAGC	VG12A5HT+94NGGC	VG12A5HT+94NBGC	VG12A5HT+94NBAC
VG12A5LT				VG12A5LT+94NAGC	VG12A5LT+94NGGC	VG12A5LT+94NBGC	VG12A5LT+94NBAC
VG12A5HU		117		VG12A5HU+94NAGC	VG12A5HU+94NGGC	VG12A5HU+94NBGC	VG12A5HU+94NBAC
VG12A5LU				VG12A5LU+94NAGC	VG12A5LU+94NGGC	VG12A5LU+94NBGC	VG12A5LU+94NBAC
VG12A5HV		176		VG12A5HV+94NAGC	VG12A5HV+94NGGC	VG12A5HV+94NBGC	VG12A5HV+94NBAC
VG12A5LV				VG12A5LV+94NAGC	VG12A5LV+94NGGC	VG12A5LV+94NBGC	VG12A5LV+94NBAC
VG12A5HW		211		VG12A5HW+94NAGC	VG12A5HW+94NGGC	VG12A5HW+94NBGC	VG12A5HW+94NBAC
VG12A5LW				VG12A5LW+94NAGC	VG12A5LW+94NGGC	VG12A5LW+94NBGC	VG12A5LW+94NBAC
VG12A5JU	4	117	100	VG12A5JU+94NAGC	VG12A5JU+94NGGC	VG12A5JU+94NBGC	VG12A5JU+94NBAC
VG12A5JV		176		VG12A5JV+94NAGC	VG12A5JV+94NGGC	VG12A5JV+94NBGC	VG12A5JV+94NBAC
VG12A5MW		190		VG12A5MW+94NAGC	VG12A5MW+94NGGC	VG12A5MW+94NBGC	VG12A5MW+94NBAC
VG12A5NY	5	290		VG12A5NY+94NAGC	VG12A5NY+94NGGC	VG12A5NY+94NBGC	VG12A5NY+94NBAC
VG12A5PZ	6	350		VG12A5PZ+94NAGC	VG12A5PZ+94NGGC	VG12A5PZ+94NBGC	VG12A5PZ+94NBAC
<b>Three-Way – Spring Return Counterclockwise – Port A (Coil) Open to Port AB (Common) – with Two Auxiliary Switches</b>							
VG18A5GS	2-1/2	47 / 29	50	VG18A5GS+92NAGC	VG18A5GS+92NGGC	VG18A5GS+92NBGC	VG18A5GS+92NBAC
VG18A5KS				VG18A5KS+92NAGC	VG18A5KS+92NGGC	VG18A5KS+92NBGC	VG18A5KS+92NBAC
VG18A5GT		74 / 47		VG18A5GT+92NAGC	VG18A5GT+92NGGC	VG18A5GT+92NBGC	VG18A5GT+92NBAC
VG18A5KT				VG18A5KT+92NAGC	VG18A5KT+92NGGC	VG18A5KT+92NBGC	VG18A5KT+92NBAC
VG18A5GU		117 / 74		VG18A5GU+92NAGC	VG18A5GU+92NGGC	VG18A5GU+92NBGC	VG18A5GU+92NBAC
VG18A5KU				VG18A5KU+92NAGC	VG18A5KU+92NGGC	VG18A5KU+92NBGC	VG18A5KU+92NBAC
VG18A5HT	3	74 / 47	50	VG18A5HT+92NAGC	VG18A5HT+92NGGC	VG18A5HT+92NBGC	VG18A5HT+92NBAC
VG18A5LT				VG18A5LT+92NAGC	VG18A5LT+92NGGC	VG18A5LT+92NBGC	VG18A5LT+92NBAC
VG18A5HU		117 / 74		VG18A5HU+92NAGC	VG18A5HU+92NGGC	VG18A5HU+92NBGC	VG18A5HU+92NBAC
VG18A5LU				VG18A5LU+92NAGC	VG18A5LU+92NGGC	VG18A5LU+92NBGC	VG18A5LU+92NBAC
VG18A5HV		176 / 88		VG18A5HV+92NAGC	VG18A5HV+92NGGC	VG18A5HV+92NBGC	VG18A5HV+92NBAC
VG18A5LV				VG18A5LV+92NAGC	VG18A5LV+92NGGC	VG18A5LV+92NBGC	VG18A5LV+92NBAC
VG18A5HW		211 / 105		VG18A5HW+92NAGC	VG18A5HW+92NGGC	VG18A5HW+92NBGC	VG18A5HW+92NBAC
VG18A5LW				VG18A5LW+92NAGC	VG18A5LW+92NGGC	VG18A5LW+92NBGC	VG18A5LW+92NBAC
VG18A5JU	4	117 / 74	50	VG18A5JU+92NAGC	VG18A5JU+92NGGC	VG18A5JU+92NBGC	VG18A5JU+92NBAC
VG18A5JV		176 / 88		VG18A5JV+92NAGC	VG18A5JV+92NGGC	VG18A5JV+92NBGC	VG18A5JV+92NBAC
VG18A5MW		190 / 190		VG18A5MW+92NAGC	VG18A5MW+92NGGC	VG18A5MW+92NBGC	VG18A5MW+92NBAC

**Table 5: Flanged Stainless Steel Trim Ball Valves with Spring Return Electric Actuators with Two Switches (Part 3 of 3)**

Valve	Size, in.	Cv	Closeoff PSIG	AC 24 V			AC 120 V
				Floating	DC 0 to 10 V Prop.	On/Off	On/Off
				M9220-AGC-3	M9220-GGC-3	M9220-BGC-3	M9220-BAC-3
VG18A5NY	5	290 / 190	100	VG18A5NY+92NAGC	VG18A5NY+92NGGC	VG18A5NY+92NBGC	VG18A5NY+92NBAC
VG18A5PZ	6	350 / 180		VG18A5PZ+92NAGC	VG18A5PZ+92NGGC	VG18A5PZ+92NBGC	VG18A5PZ+92NBAC
<b>Three-Way – Spring Return Clockwise – Port B (Bypass) Open to Port AB (Common) – with Two Auxiliary Switches</b>							
VG18A5GS	2-1/2	47 / 29	50	VG18A5GS+94NAGC	VG18A5GS+94NGGC	VG18A5GS+94NBGC	VG18A5GS+94NBAC
VG18A5KS		74 / 47		VG18A5KS+94NAGC	VG18A5KS+94NGGC	VG18A5KS+94NBGC	VG18A5KS+94NBAC
VG18A5GT				VG18A5GT+94NAGC	VG18A5GT+94NGGC	VG18A5GT+94NBGC	VG18A5GT+94NBAC
VG18A5KT				VG18A5KT+94NAGC	VG18A5KT+94NGGC	VG18A5KT+94NBGC	VG18A5KT+94NBAC
VG18A5GU		117 / 74		VG18A5GU+94NAGC	VG18A5GU+94NGGC	VG18A5GU+94NBGC	VG18A5GU+94NBAC
VG18A5KU		VG18A5KU+94NAGC		VG18A5KU+94NGGC	VG18A5KU+94NBGC	VG18A5KU+94NBAC	
VG18A5HT	3	74 / 47	50	VG18A5HT+94NAGC	VG18A5HT+94NGGC	VG18A5HT+94NBGC	VG18A5HT+94NBAC
VG18A5LT		117 / 74		VG18A5LT+94NAGC	VG18A5LT+94NGGC	VG18A5LT+94NBGC	VG18A5LT+94NBAC
VG18A5HU				VG18A5HU+94NAGC	VG18A5HU+94NGGC	VG18A5HU+94NBGC	VG18A5HU+94NBAC
VG18A5LU				VG18A5LU+94NAGC	VG18A5LU+94NGGC	VG18A5LU+94NBGC	VG18A5LU+94NBAC
VG18A5HV		176 / 88		VG18A5HV+94NAGC	VG18A5HV+94NGGC	VG18A5HV+94NBGC	VG18A5HV+94NBAC
VG18A5LV		211 / 105		VG18A5LV+94NAGC	VG18A5LV+94NGGC	VG18A5LV+94NBGC	VG18A5LV+94NBAC
VG18A5HW				VG18A5HW+94NAGC	VG18A5HW+94NGGC	VG18A5HW+94NBGC	VG18A5HW+94NBAC
VG18A5LW				VG18A5LW+94NAGC	VG18A5LW+94NGGC	VG18A5LW+94NBGC	VG18A5LW+94NBAC
VG18A5JU	4	117 / 74	50	VG18A5JU+94NAGC	VG18A5JU+94NGGC	VG18A5JU+94NBGC	VG18A5JU+94NBAC
VG18A5JV		176 / 88		VG18A5JV+94NAGC	VG18A5JV+94NGGC	VG18A5JV+94NBGC	VG18A5JV+94NBAC
VG18A5MW		190 / 190		VG18A5MW+94NAGC	VG18A5MW+94NGGC	VG18A5MW+94NBGC	VG18A5MW+94NBAC
VG18A5NY	5	290 / 190		VG18A5NY+94NAGC	VG18A5NY+94NGGC	VG18A5NY+94NBGC	VG18A5NY+94NBAC
VG18A5PZ	6	350 / 180		VG18A5PZ+94NAGC	VG18A5PZ+94NGGC	VG18A5PZ+94NBGC	VG18A5PZ+94NBAC



**Table 6: Shipping Weights, lb (kg)<sup>1</sup>**

<b>Valve Code Number</b>	<b>Description</b>	<b>Shipping Weight, lb (kg)</b>
<b>VG12A5Gx</b>	2-1/2 in. (DN65) two-way flanged ball valve, ASME 150 flanged end connections with large face-to-face dimensions	34 (15.4)
<b>VG12A5Kx</b>	2-1/2 in. (DN65) two-way flanged ball valve, ASME 150 flanged end connections with narrow face-to-face dimensions	13.2 (6)
<b>VG12A5Hx</b>	3 in. (DN80) two-way flanged ball valve, ASME 150 flanged end connections with large face-to-face dimensions	36 (16.3)
<b>VG12A5Lx</b>	3 in. (DN80) two-way flanged ball valve, ASME 150 flanged end connections with narrow face-to-face dimensions	18.2 (8.3)
<b>VG12A5Jx</b>	4 in. (DN100) two-way flanged ball valve, ASME 150 flanged end connections with large face-to-face dimensions	44 (20.0)
<b>VG12A5MW</b>	4 in. (DN100) two-way flanged ball valve, ASME 150 flanged end connections with narrow face-to-face dimensions	53.2 (24.1)
<b>VG12A5NY</b>	5 in. (DN125) two-way flanged ball valve, ASME 150 flanged end connections with narrow face-to-face dimensions	61.2 (27.8)
<b>VG12A5PZ</b>	6 in. (DN150) two-way flanged ball valve, ASME 150 flanged end connections with narrow face-to-face dimensions	68.8 (31.2)
<b>VG18A5Gx</b>	2-1/2 in. (DN65) three-way flanged ball valve, ASME 150 flanged end connections with large face-to-face dimensions	43 (19.5)
<b>VG18A5Kx</b>	2-1/2 in. (DN65) three-way flanged ball valve, ASME 150 flanged end connections with narrow face-to-face dimensions	23.2 (10.5)
<b>VG18A5Hx</b>	3 in. (DN80) three-way flanged ball valve, ASME 150 flanged end connections with large face-to-face dimensions	49 (22.2)
<b>VG18A5Lx</b>	3 in. (DN80) three-way flanged ball valve, ASME 150 flanged end connections with narrow face-to-face dimensions	23.2 (13.7)
<b>VG18A5Jx</b>	4 in. (DN100) three-way flanged ball valve, ASME 150 flanged end connections with large face-to-face dimensions	62 (28.1)
<b>VG18A5MW</b>	4 in. (DN100) three-way flanged ball valve, ASME 150 flanged end connections with narrow face-to-face dimensions	75.2 (34.1)
<b>VG18A5NY</b>	5 in. (DN125) two-way flanged ball valve, ASME 150 Flanged End connections with narrow face-to-face dimensions	87.9 (39.9)
<b>VG18A5PZ</b>	6 in. (DN150) two-way flanged ball valve, ASME 150 Flanged End connections with narrow face-to-face dimensions	96.4 (43.7)

1. For M9100 actuated non-spring return valve assemblies, add 4.4 lb (2.0 kg); for M9220 actuated valve assemblies, add 9.1 lb (4.1 kg).

**Table 7: Valid Ball Valve, Electric Actuator, Linkage, and Weathershield Combinations (for Field Assembly) (Part 1 of 2)**

<b>Valve Size, in. (DN)</b>	<b>Valve Code Number</b>	<b>Actuator Base Number</b>	<b>Link Kit Code Number</b>	<b>Optional Weathershield Code Number</b>
<b>2-1/2 (DN65)</b>	VG12A5Gx, VG18A5Gx VG12A5Kx, VG18A5Kx	M9124	M9000-518	M9000-330
		M9220	M9000-519	M9000-340
<b>3 (DN80)</b>	VG12A5Hx, VG18A5Hx VG12A5Lx, VG18A5Lx	M9124	M9000-518	M9000-330
		M9220	M9000-519	M9000-340
<b>4 (DN100)</b>	VG12A5Jx, VG18A5Jx VG12A5MZ, VG18A5MZ	M9124	M9000-518	M9000-330
		M9220	M9000-519	M9000-340

**Table 7: Valid Ball Valve, Electric Actuator, Linkage, and Weathershield Combinations (for Field Assembly) (Part 2 of 2)**

Valve Size, in. (DN)	Valve Code Number	Actuator Base Number	Link Kit Code Number	Optional Weathershield Code Number
5 (DN125)	VG12A5NY, VG18A5NY	M9124	M9000-518	M9000-330
		M9220	M9000-519	M9000-340
6 (DN150)	VG12A5PZ, VG18A5PZ	M9124	M9000-518	M9000-330
		M9220	M9000-519	M9000-340

## Product Details

Available in sizes 2-1/2 to 6 in. (DN65 to DN150), VG1000 Series Flanged Ball Valves are specifically designed for automated commercial HVAC service. These valves feature a 300 Series stainless steel ball and stem for high temperature water to 284°F (140°C) and saturated steam to 25 psi.

The stem and mounting flange, combined with an innovative double O-ring stem seal, provide quick and easy electric actuator field mounting while ensuring long life and leak-free valve performance. The specially engineered, graphite-reinforced PTFE seat with flexible PTFE seat design (backed with EPDM O-rings) significantly reduces the operating torque, allowing the smallest possible electric actuator available to provide the force required for each specific application. Two-Way valve assemblies provide 100 psig (689 kPa), and three-way assemblies provide 50 psi (345 kPa) closeoff pressure while ensuring operation after long idle periods.

VG1000 Series Flanged Ball Valves are designed for factory or field mounting to Johnson Controls® M9124 Non-Spring Return and M9220 Spring Return Series Electric Actuators, which are ideally suited for on/off, floating, or proportional HVAC service. To field-couple an actuator to a valve, use an M9000-518 Linkage Kit for M9124 actuators or an M9000-519 Linkage Kit for M9220 actuators. The cost-effective, reliable design makes the VG1000 Series Ball Valves maintenance-free.

**IMPORTANT:** The VG1000 Series Valves are intended to control saturated steam, hot water, and chilled water flow under normal equipment operating conditions. Where failure or malfunction of the valve could lead to personal injury or property damage to the controlled equipment or other property, additional precautions must be designed into the system. Incorporate and maintain other devices, such as supervisory or alarm systems or safety or limit controls, intended to warn of or protect against failure or malfunction of the valve.


### **Electric Actuator Control Signal Action**

Two-way VG1000 Series Ball Valves are fully open when the electric actuator is fully counterclockwise (CCW) and fully closed when the electric actuator is fully clockwise (CW).


For three-way valves, Coil Port A and Common Port AB are fully open when the electric actuator is fully CCW, as shown in Figure 2. Bypass Port B and Common Port AB are fully open when the actuator is fully CW, as shown in Figure 3.

For non-spring return and spring-to-open proportional control models in the direct-acting mode, a minimum control signal drives the electric actuator to the fully CCW position, while a maximum control signal drives the electric actuator to the fully CW position.

**Figure 2: VG18A5 Series Three-Way Ball Valve  
(Coil Port A Open to Common Port AB)**

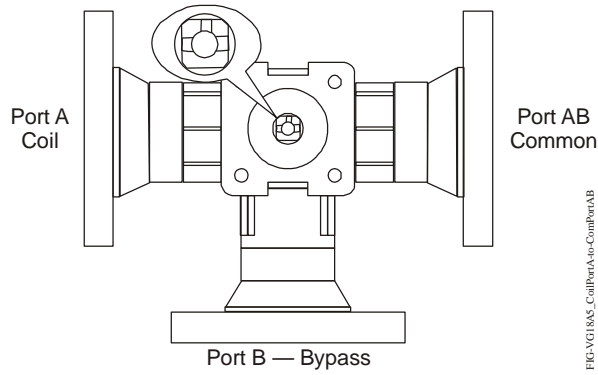

**Figure 3: VG18A5 Series Three-Way Ball Valve  
(Bypass Port B Open to Common Port AB)**

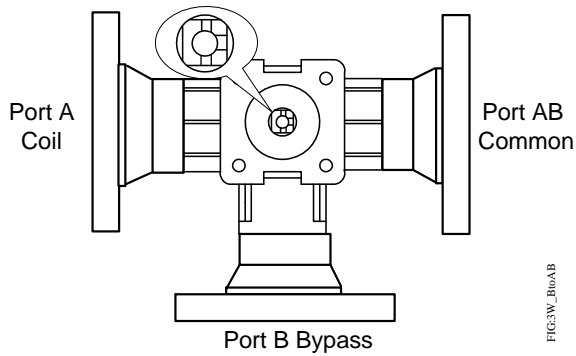

For spring-to-close proportional control models in the direct-acting mode, a minimum control signal drives the electric actuator to the fully CW position, whereas a maximum control signal drives the electric actuator to the fully CCW position. For more information on these electric actuator series, as well as details on models available, refer to the following documentation:

- *M9108, M9116, M9124, and M9132 Series Electric Non-spring Return Actuators Product Bulletin (LIT-2681058)*
- *M9220-xxx-3 Electric Spring Return Actuators Product Bulletin (LIT-12011057)*


### Repair Information

If the VG1000 Series Flanged Ball Valve fails to operate within its specifications, replace the unit. For a replacement valve, contact the nearest Johnson Controls representative.


## Piping

See Figure 4 for typical piping configurations:

**Figure 4: Typical VG1000 Series Flanged Ball Valve Piping Application**

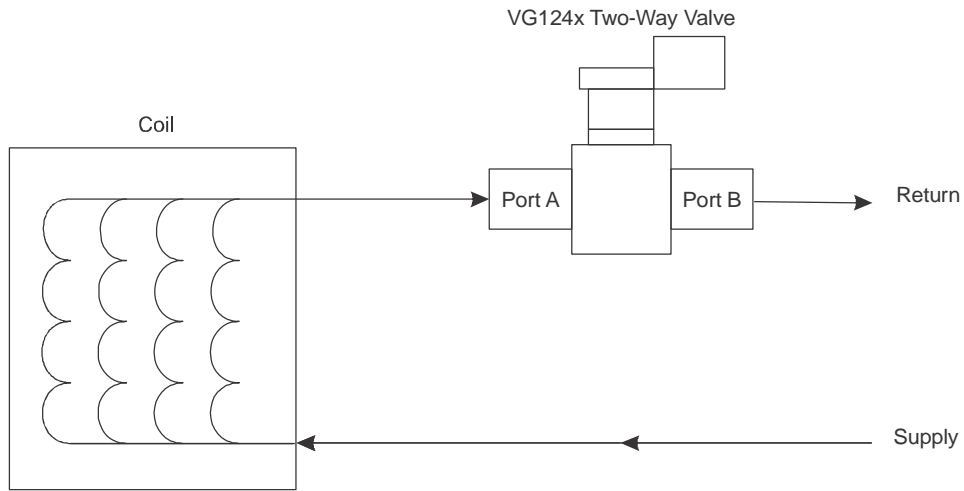

**Typical Two-Way Ball Valve Application**

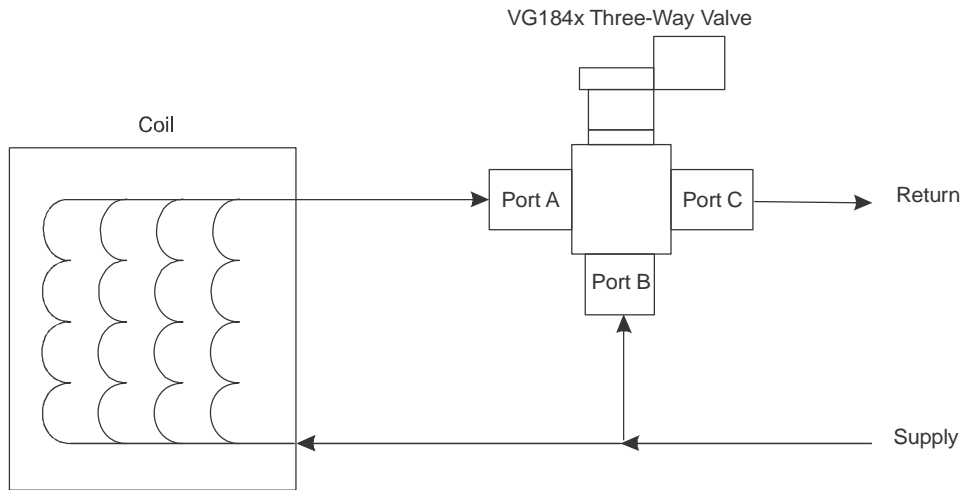

**Typical Three-Way Ball Valve Application**


FIG:VG1000pipapp

**Note:** Mount the valve downstream from the coil to minimize heat transfer to the actuator.

## Dimensions

Figure 5 depicts VG12A5xx Two-Way Series Flanged Ball Valves combined with the M9124 Series Actuators, identifying the dimensions listed in Table 8. See Figure 6 for corresponding information for the VG18A5xx Three-Way Series Flanged Ball Valves combined with the M9124 Series Actuators.

**Figure 5: M9124 Series Actuated VG12A5xx Two-Way Series Ball Valves, in. (mm)**

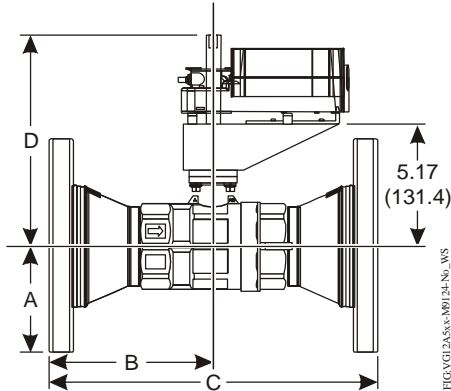

**Figure 6: M9124 Series Actuated VG18A5xx Three-Way Series Ball Valves**



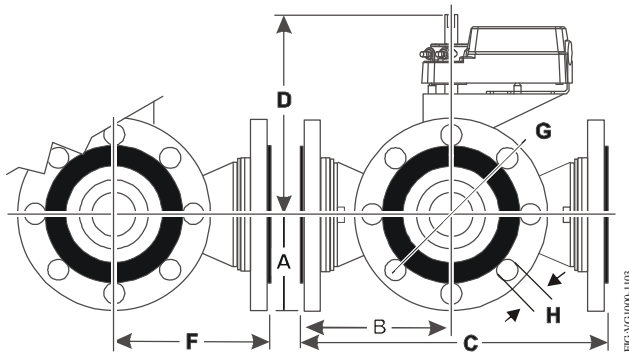


Figure 7 depicts VG12A5xx Two-Way Series Flanged Ball Valves combined with the M9220 Series Actuators, identifying the dimensions listed in Table 8. See Figure 8 for corresponding information for the VG18A5xx Three-Way Series Flanged Ball Valves combined with the M9220 Series Actuators.

**Figure 7: M9220 Series Actuated VG12A5xx Two-Way Series Ball Valves, in. (mm)**

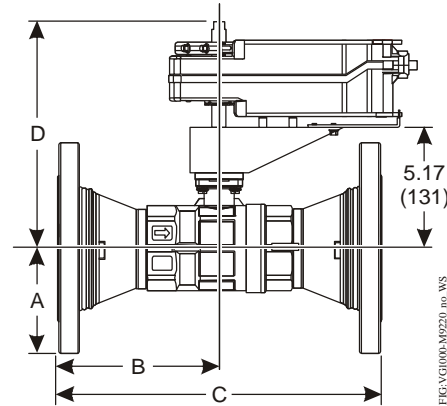

**Figure 8: M9220 Series Actuated VG18A5xx Three-Way Series Ball Valves**

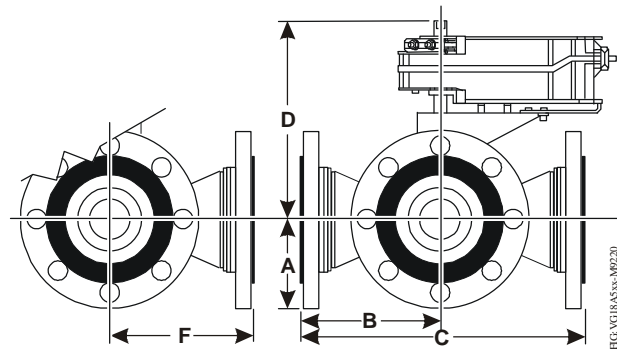

**Table 8: VG1xA5xx Series Ball Valves Dimensions, in. (mm) (Part 1 of 2)**

Valve Size, in. (DN)	A	Valve Code	B	C	D		F	G (Bolt Circle)	H	Number of Bolts
					M9124 <sup>1</sup>	M9220 <sup>1</sup>				
2-1/2 (DN65)	3.50 (89)	VG1xA5Gx	5.71 (145)	11.42 (290)	8.89 (226)	9.64 (245)	5.87 (149)	5.50 (140)	0.75 (19)	4
		VG1xA5Kx	3.60 (92)	7.25 (184)	9.10 (230)	10.24 (260)	6.73 (171)			
3 (DN80)	3.75 (95)	VG1xA5Hx	6.10 (155)	12.20 (310)	9.10 (230)	10.24 (260)	6.26 (159)	6.00 (152)	0.75 (19)	4
		VG1xA5Lx	4.30 (110)	8.70 (220)			6.77 (172)			
4 (DN100)	4.50 (114)	VG1xA5Jx	6.89 (175)	13.77 (350)	9.10 (230)	10.24 (260)	7.05 (179)	7.50 (191)	0.75 (19)	8
		VG1xA5MW	5.24 (133)	10.50 (266)	10.10 (256)	11.25 (286)	8.27 (210)			


**Table 8: VG1xA5xx Series Ball Valves Dimensions, in. (mm) (Part 2 of 2)**

Valve Size, in. (DN)	A	Valve Code	B	C	D		F	G (Bolt Circle)	H	Number of Bolts
					M9124 <sup>1</sup>	M9220 <sup>1</sup>				
5 (DN125)	5.00 (127)	VG1xA5NY	6.25 (159)	12.52 (318)	10.10 (256)	11.25 (286)	9.13 (232)	8.50 (217)	0.87 (22)	8
6 (DN150)	5.50 (140)	VG1xA5PZ	7.25 (184)	14.50 (368)	10.10 (256)	11.25 (286)	9.90 (251)	9.50 (242)	0.87 (22)	8

1. Allow a minimum of 4 in. clearance above the shaft to remove the actuator.

Figure 9 depicts VG12A5xx Two-Way Series Flanged Ball Valves combined with the M9124 Series Non-Spring Return Actuators, identifying the dimensions listed in Table 9. See Figure 10 for corresponding information for the VG18A5xx Three-Way Series Flanged Ball Valves combined with the M9124 Series Non-Spring Return Actuators. Each drawing includes dimensions for the field-installed M9000-330 Weathershield.

**Figure 9: M9124 Series Actuated VG12A5xx Two-Way Series Ball Valves with M9000-330 Weathershield Dimensions, in. (mm)**

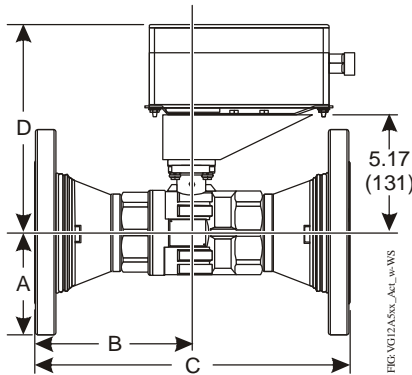

**Figure 10: M9124 Series Actuated VG18A5xx Three-Way Series Ball Valves with M9000-330 Weathershield**



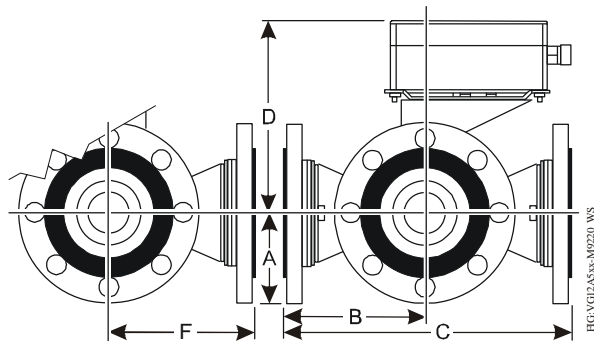


Figure 11 depicts VG12A5xx Two-Way Series Flanged Ball Valves combined with the M9220 Series Spring Return Actuators identifying the dimensions listed in Table 9. See Figure 12 for corresponding information for the VG18A5xx Three-Way Series Flanged Ball Valves combined with the M9220 Series Spring Return Actuators dimensions. Each drawing includes dimensions for the field-installed M9000-340 Weathershield.

**Figure 11: M9220 Series Actuated VG12A5xx Two-Way Series Ball Valves with M9000-340 Weathershield Dimensions, in. (mm)**

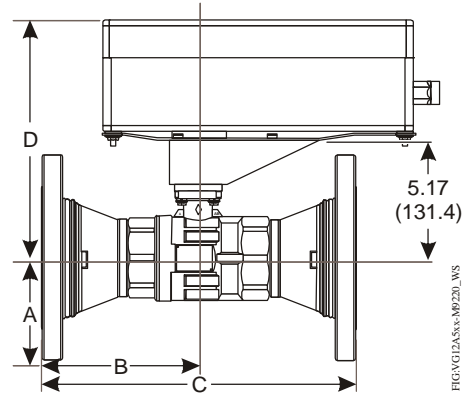

**Figure 12: M9220 Series Actuated VG18A5xx Three-Way Series Ball Valves with M9000-340 Weathershield**

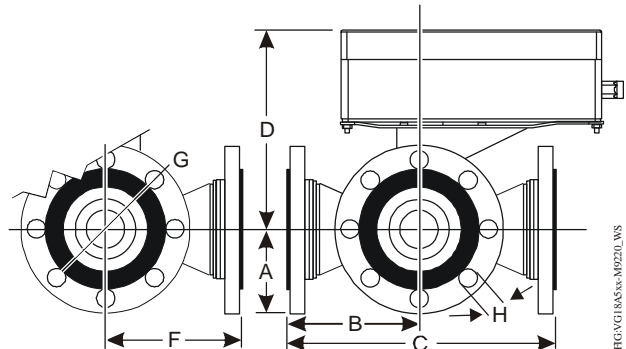


**Table 9: VG1xA5xx Series Ball Valves Dimensions, in. (mm)**

Valve Size, in. (DN)	A	Valve Code	B	C	D		F	G (Bolt Circle)	H	Number of Bolts
					M9124 <sup>1</sup>	M9220 <sup>1</sup>				
<b>2-1/2 (DN65)</b>	3.50 (89)	VG1xA5Gx	5.71 (145)	11.42 (290)	8.89 (226)	9.64 (245)	5.87 (149)	5.50 (140)	0.75 (19)	4
		VG1xA5Kx	3.60 (92)	7.25 (184)			6.73 (171)			
<b>3 (DN80)</b>	3.75 (95)	VG1xA5Hx	6.10 (155)	12.20 (310)	8.90 (226)	9.65 (245)	6.26 (159)	6.00 (152)	0.75 (19)	4
		VG1xA5Lx	4.30 (110)	8.70 (220)			6.77 (172)			
<b>4 (DN100)</b>	4.50 (114)	VG1xA5Jx	6.89 (175)	13.77 (350)	8.90 (226)	9.65 (245)	7.05 (179)	7.50 (191)	0.75 (19)	8
		VG1xA5MW	5.24 (133)	10.50 (266)	9.90 (251)	10.63 (270)	8.27 (210)			
<b>5 (DN125)</b>	5.00 (127)	VG1xA5NY	6.25 (159)	12.52 (318)	9.90 (251)	10.63 (270)	9.13 (232)	8.50 (217)	0.87 (22)	8
<b>6 (DN150)</b>	5.50 (140)	VG1xA5PZ	7.25 (184)	14.50 (368)	9.90 (251)	10.63 (270)	9.90 (251)	9.50 (242)	0.87 (22)	8

1. Allow a minimum of 4 in. clearance above the shaft to remove the actuator.

## Technical Specifications

### VG1000 Series Flanged Ball Valves

<b>Service<sup>1</sup></b>		Hot water, chilled water, 50/50 glycol solutions, and 25 psig (172 kPa) saturated steam for HVAC systems
<b>Valve Fluid Temperature Limits</b>		0 to 284°F (-18 to 140°C)
<b>Valve Body Pressure/ Temperature Rating</b>	<b>Water</b>	ASME Class 150 250 psi at -20 to 100°F (29 to 38°C) 235 psi at: 200°F(93°C) 218 psi at: 284°F(140°C)
	<b>Steam</b>	25 psig (172 kPa) saturated steam for HVAC systems
<b>Maximum Closeoff Pressure</b>	<b>Two-Way</b>	100 psi (689 kPa)
	<b>Three-Way</b>	50 psi (345 kPa)
<b>Maximum Recommended Operating Pressure Drop</b>		30 psi (207 kPa)
<b>Flow Characteristics</b>	<b>Two-Way</b>	Equal percentage
	<b>Three-Way</b>	Equal percentage flow characteristics of in-line port or linear percentage flow characteristics of angle port
<b>Rangeability<sup>2</sup></b>		Greater than 500:1
<b>Leakage</b>	<b>Two- or Three-Way</b>	0.01% of Maximum Flow, Control Port, ANSI/FCI 70-2, Class 4
	<b>Three-Way</b>	1% of Maximum Flow, Bypass Port
<b>End Connections</b>		ASME Class 150 Flange
<b>Minimum Ambient Operating Temperature</b>	<b>-4°F (-20°C)</b>	M9124 Series Non-Spring Return Actuators
	<b>-40°F (-40°C)</b>	M9220 Series Spring Return Actuators
<b>Maximum Ambient Operating Temperature<sup>3</sup></b>	<b>122°F (50°C)</b>	M9124 Series Non-Spring Return Actuators
	<b>131°F (55°C)</b>	M9220 Series Spring Return Actuators
<b>Materials</b>	<b>Body</b>	Brass
	<b>Flanges</b>	Ductile Iron
	<b>Ball</b>	300 series stainless steel
	<b>Stem</b>	300 series stainless steel
	<b>Seats</b>	Graphite reinforced PTFE with EPDM O-Ring backing
	<b>Stem Seals</b>	EPDM O-Rings
	<b>Flow Control Disk</b>	Amodel AS-1145HS Polyphthalamide Resin
<b>Compliance</b> 	<b>Europe</b>	CE Mark - Johnson Controls declares that this product is in compliance with the essential requirements and other relevant provisions of the Pressure Equipment Directive (PED).

1. Refer to VDI 2035 Guideline for proper water treatment.
2. Rangeability is defined as the ratio of maximum controllable flow to minimum controllable flow.
3. In steam applications, install the valve with the stem horizontal to the piping and wrap the valve and piping with insulation.

*The performance specifications are nominal and conform to acceptable industry standards. For application at conditions beyond these specifications, consult the local Johnson Controls office. Johnson Controls shall not be liable for damages resulting from misapplication or misuse of its products.*





**Building Technologies & Solutions**  
507 E. Michigan Street, Milwaukee, WI 53202

*Metasys® and Johnson Controls® are registered trademarks of Johnson Controls.  
All other marks herein are the marks of their respective owners. © 2017 Johnson Controls.*

---

VG1000 Series Flanged Ball Valves Product Bulletin