

Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Application

Frese OPTIMA Compact pressure independent balancing & control valve (PIBCV) is used in heating and cooling systems in applications with Air Handling Units, Heat Exchangers or Mixing Circuits.

Frese OPTIMA Compact provides modulating control with full authority regardless of any fluctuations in the differential pressure of the system.

Frese OPTIMA Compact combines an externally adjustable automatic balancing valve, a differential pressure control valve and a full authority modulating control valve.

Frese OPTIMA Compact makes it simple to achieve 100% control of the water flow in the building, while creating high comfort and energy savings at the same time.

An additional benefit is that no balancing is required if further stages are added to the system, or if the dimensioned capacity is changed.

Energy saving due to optimal control, lower flow and pump pressure. Maximized ΔT due to faster response and increased system stability.

Benefits

Design

- Less time to define the necessary equipment for a hydraulic balanced system (only flow data are required)
- No need to calculate valve authority - always one
- Flexibility if the system is modified after the initial installation

Installation

- No further regulating valves required in the distribution pipework when Frese OPTIMA Compact is installed at the units
- Total number of valves minimized due to the 3-in-1 design
- Minimized commissioning time due to automatic balancing of the system
- No minimum straight pipe lengths required before or after the valve

Operation



- High comfort for the end-users due to high precision temperature control
- Longer life due to less movements of the actuator



Features

- The presetting function has no impact on the stroke; Full stroke modulation at all times, regardless the preset flow
- Regulation characteristic remains unchanged regardless of preset flow
- The constant differential pressure across the modulating control component guarantees 100% authority
- Automatic balancing eliminates overflows, regardless of fluctuating pressure conditions in the system
- Motoric actuator 0-10 V and 3 point control
- Differential pressure operating range up to 800 kPa
- High flows with minimal required differential pressure due to advanced design of the valve
- Small dimensions due to compact housing
- Higher presetting precision due to stepless analogue scale
- Rangeability > 100:1

Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

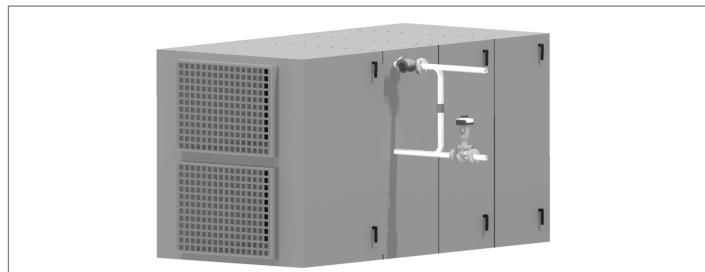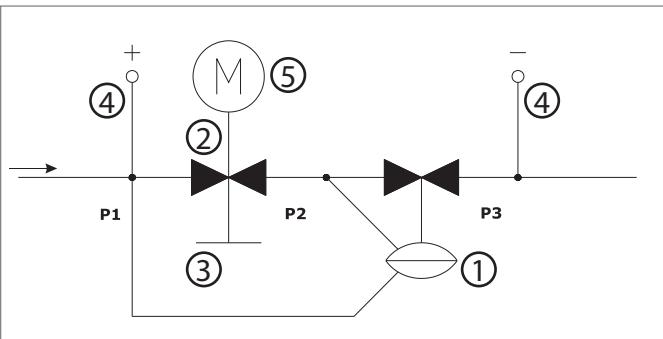

Function

Frese OPTIMA Compact can be flushed and commissioned before the actuator is installed.

The presetting of the dial is user-friendly requiring only a simple flow vs. presetting graph.

Once the flow is set, the actuator can be mounted and the valve ready to operate.

For lowest energy consumption, check the differential pressure at the index valve to set the pump at minimum speed.

Operating Pressure

The Frese OPTIMA Compact (DN50 to DN300) can operate to a maximum differential pressure of 800 kPa (8 bar)

Close Off Pressure

The Frese OPTIMA Compact is capable of closing against the following differential pressure to EN 1349 Class IV:

DN50 to DN125: 800 kPa - based on 800N actuator force


DN150 to DN200: 800 kPa - based on 1100N actuator force

DN250 to DN300: 800 kPa - based on 2000N actuator force

Manual Operation

Actuators

The actuators can be operated by the manual handle. (5)

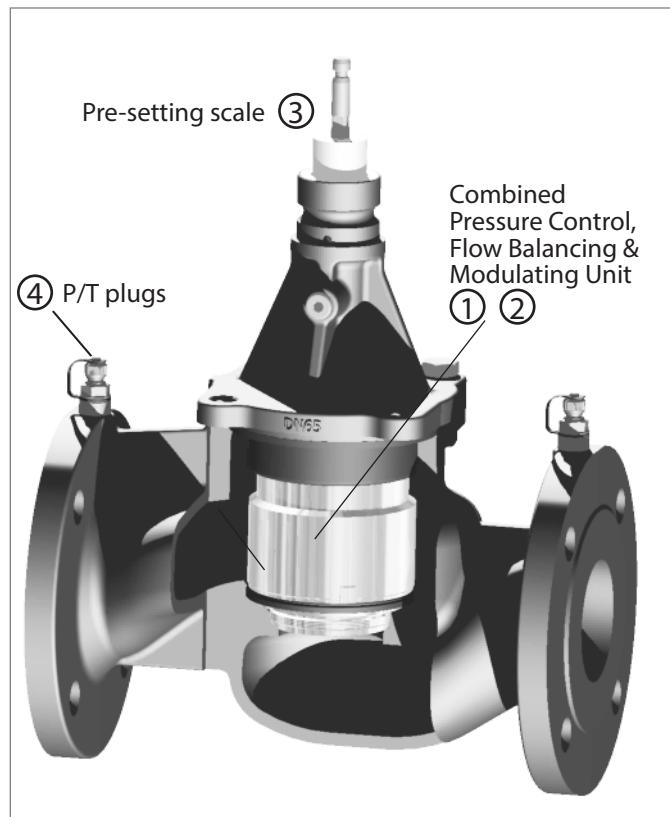

Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Operation principle

The innovative design of Frese OPTIMA Compact features a modulating control component that retains 100% authority at all times.


With the Frese OPTIMA Compact there are two independent movements for the presetting and the modulating function. During presetting, the inlet area moves radially without interfering with the length of the stroke. During modulating, the inlet area moves axial taking advantage of the full stroke.

Whilst the control component provides proportional modulation irrespective of the preset flow, the automatic balancing guarantees that the flow will never exceed the maximum preset flow.

Regardless of pressure fluctuations in the system, the maximum flow is kept constant up to a maximum differential pressure of 800 kPa.


Flow rate vs. Differential Pressure

Preset flow: 24000 l/h, 12000 l/h

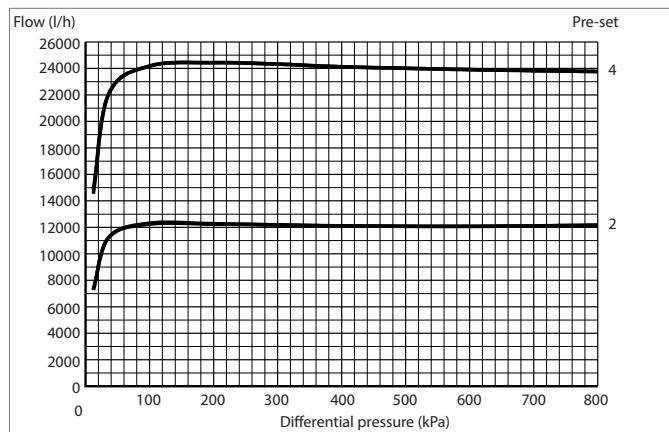


Flow rate vs. Voltage

Preset flow: 25000 l/h

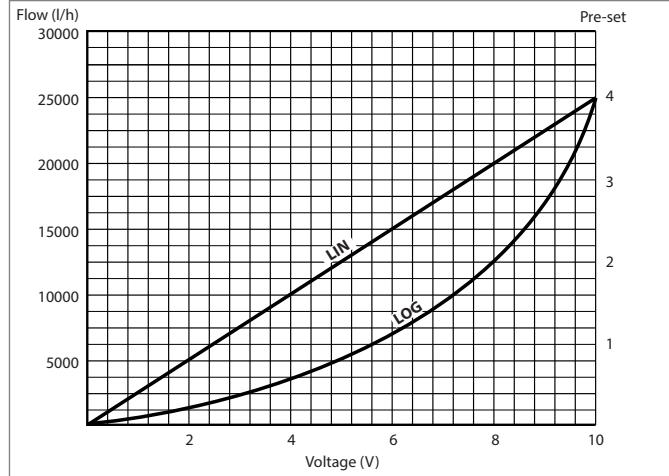

Flow rate vs. Differential Pressure

Voltage: 10V, 7V, 3V
(Linear actuator characteristic)

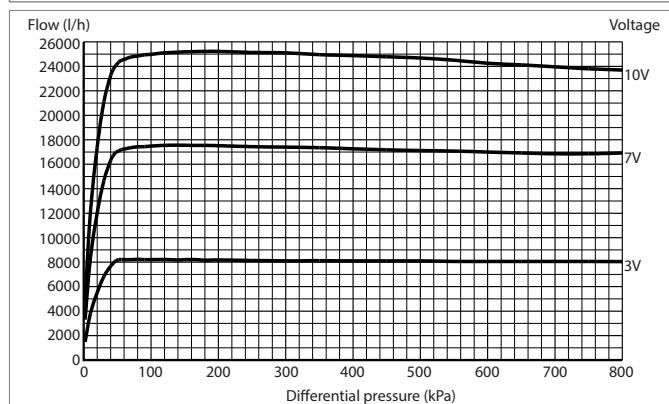


Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Technical data DN50 - DN80

Valve

Valve housing DN50-DN65:	GJL-250 PN16 GJS-400 PN25
Valve housing DN80:	GJS-400 PN16/PN25
DP controller:	Stainless steel
Spring:	Stainless steel
Diaphragm:	Reinforced EPDM
O-rings:	EPDM
Pressure class:	PN16/25
Stroke:	20 mm
Flange connections:	ISO 7005-2 / EN 1092-2
Max. differential pressure:	800 kPa
Medium temperature range:	0°C to 120°C -10°C to 120°C
With stem heater mounted:	

The pipe system shall be properly ventilated to avoid risk of air pockets. Glycolic mixtures up to 50% are applicable (both ethylene and propylene). Frese A/S can accept no responsibility if another actuator is used instead of the Frese actuator. Recommendation: Water treatment to VDI 2035.

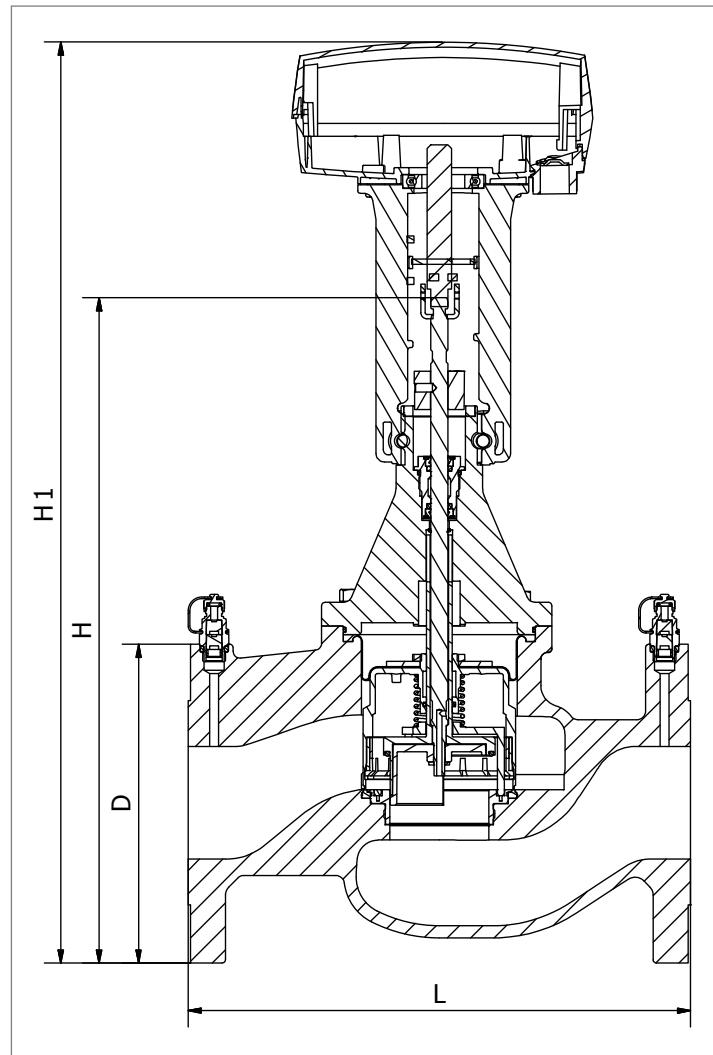

Dimension & Weight DN50-DN80

Dim.		DN50	DN65	DN80
		ISO	ISO	ISO
Dimensions mm	L	230	290	310
	H	367	384	413
	H1	508	525	554
	D	165	185	200
Weight kg	PN16	14.5	18.9	27.3
	PN25	14.1	19.2	27.5

Flow

Dim.		DN50		DN65		DN80	
Type		LF	HF	LF	HF	LF	HF
Flow	m³/h	2.48 - 15.00	3.92 - 24.00	4.38 - 25.00	5.95 - 35.00	5.34 - 34.00	7.02 - 43.00
	l/s	0.689 - 4.167	1.089 - 6.667	1.216 - 6.945	1.654 - 9.724	1.484 - 9.450	1.951 - 11.954
	gpm	10.92 - 66.03	17.28 - 105.65	19.27 - 110.06	26.21 - 154.11	23.53 - 149.78	30.92 - 189.47

Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Technical data DN100 - DN150

Valve

Valve housing DN100 & 150: GJS-400 PN16/PN25

Valve housing DN125: GJL-250 PN16
GJS-400 PN25

DP controller: Stainless steel

Spring: Stainless steel

Diaphragm: Reinforced EPDM

O-rings: EPDM

Pressure class: PN16/25

Stroke DN100-DN125 40 mm

Stroke DN150 43 mm

Flange connections: ISO 7005-2 / EN 1092-2

Max. differential pressure: 800 kPa


Medium temperature range:

DN100-DN125: 0°C to 120°C

DN150: 0°C to 110°C

With stem heater mounted: From -10°C

The pipe system shall be properly ventilated to avoid risk of air pockets. Glycolic mixtures up to 50% are applicable (both ethylene and propylene). Frese A/S can accept no responsibility if another actuator is used instead of the Frese actuator. Recommendation: Water treatment to VDI 2035.

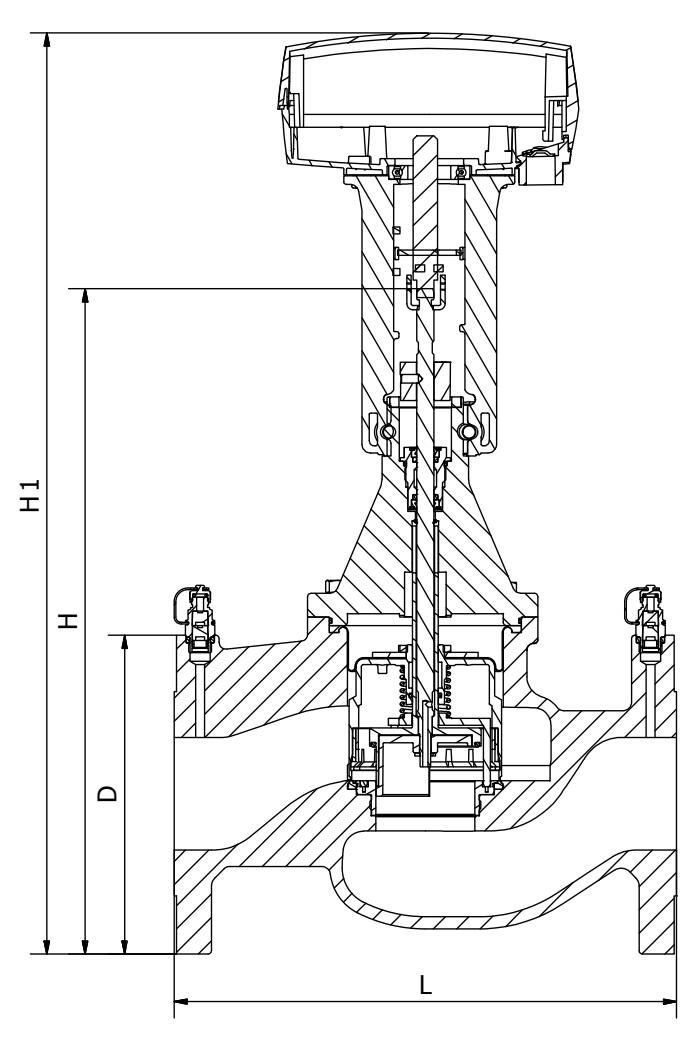

Dimension & Weight DN100 - DN150

Dim.		DN100	DN125	DN150
		ISO	ISO	ISO
Dimensions mm	L	350	400	480
	H	566	608	676
	H1	700	747	768
	D	235	270	285
Weight kg	PN16	50.1	77.2	110.6
	PN25	50.1	76.4	110.6

Flow

Dim.		DN100		DN125		DN150	
Type		LF	HF	LF	HF	LF	HF
Flow	m³/h	12.1 - 68.0	14.8 - 90.0	18.5 - 110.0	23.0 - 135.0	25.6 - 148.0	32.0 - 195.0
	l/s	3.369 - 18.891	4.100 - 25.000	5.139 - 30.556	6.389 - 37.500	7.111 - 41.110	8.889 - 54.168
	gpm	53.41-299.41	64.99-396.26	81.45-484.32	101.26-594.39	112.71-651.59	140.89-858.56


Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Technical data DN200 - DN300

Valve

Valve housing:	GJS-400 PN16/PN25
DP controller:	Stainless steel
Spring:	Stainless steel
Diaphragm:	Reinforced EPDM
O-rings:	EPDM
Pressure class:	PN16/25
Stroke DN200	43 mm
Stroke DN250-DN300	48 mm
Flange connections:	ISO 7005-2/EN 1092-2
Max. differential pressure:	800 kPa
Medium temperature range:	0°C to 110°C
DN 200 with stem heater mounted:	-10°C to 110°C

The pipe system shall be properly ventilated to avoid risk of air pockets. Glycolic mixtures up to 50% are applicable (both ethylene and propylene). Frese A/S can accept no responsibility if another actuator is used instead of the Frese actuator. Recommendation: Water treatment to VDI 2035.

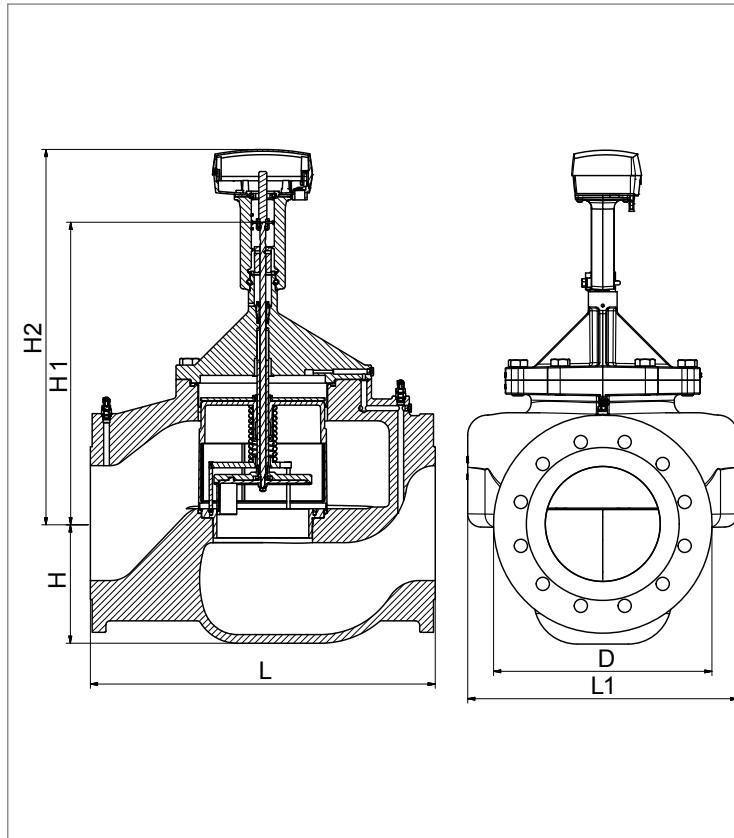

Dimension & Weight DN200 - DN300

Dim.	DN200		DN250		DN300	
	ISO	ISO	ISO	ISO	ISO	ISO
Dimensions mm	L	600	730	850		
	L1	470	549	719		
	H	209	229	279		
	H1	524	685	685		
	H2	650	872	872		
	D	380	444	520		
Weight kg	175	307		470		

Flow

Dim.	DN200		DN250		DN300	
	LF	HF	LF	HF	LF	HF
Flow	m³/h	95 - 210	130 - 280	190 - 475	245 - 600	190 - 475
	l/s	26.39 - 58.33	36.11 - 77.78	52.78 - 131.94	68.06 - 166.67	52.78 - 131.94
	gpm	418 - 925	572 - 1233	837 - 2091	1079 - 2642	837 - 2091

Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Technical data actuators DN50-300

Characteristics:	Electrical, modulating, normally closed
Protection class to EN60529:	IP 54 DN50-200 / IP66 DN250-300
Frequency AC:	50/60 Hz
Supply voltage:	24V AC/DC
Control signal:	0-10V DC or 3 position
Actuating force:	800 N/1500 N/2500 N
Stroke max:	52 mm DN50-200 / 48 mm DN250-300
Running time:	30 s DN50-200 / 288 s DN250-300
Ambient operating conditions:	-10 °C to 50 °C
Manual operation:	Manual handle
Cable:	Not included
Weight:	1.80 kg DN50-200 / 4.20 kg DN250-300



Types and operation data actuators

Type	Valve Dimension	Function	Supply voltage	Power Consumtion
Type-02	DN50-125	0-10 V / 3-pos	24 V AC +/-25% 24V DC +/- 10%	15 VA (*50VA)
Type-03	DN150-200	0-10 V / 3-pos	24 V AC +/-25% 24V DC +/- 10%	24 VA (*50VA)
Type-10	DN250-300	0-10 V / 3-pos / 2-pos	24 V AC-DC +/-20%	10VA (*18 VA)

*) Max consumption - for transformer sizing

Product programme


Dim.	Type	Flow m³/h	PN16	PN25
DN50	Low Flow	2.5 - 15.0	53-1200-02	53-1220-02
	High Flow	3.9 - 24.0	53-1210-02	53-1230-02
DN65	Low Flow	4.4 - 25.0	53-1201-02	53-1221-02
	High Flow	5.9 - 35.0	53-1211-02	53-1231-02
DN80	Low Flow	5.3 - 34.0	53-1202-02	53-1222-02
	High Flow	7.0 - 43.0	53-1212-02	53-1232-02
DN100	Low Flow	12.1-68.0	53-1203-02	53-1223-02
	High Flow	14.8-90.0	53-1213-02	53-1233-02
DN125	Low Flow	18.5-110.0	53-1204-02	53-1224-02
	High Flow	23.0-135.0	53-1214-02	53-1234-02
DN150	Low Flow	25.6-148.0	53-1205-03	53-1225-03
	High Flow	32.0-195.0	53-1215-03	53-1235-03
DN200	Low Flow	95.0 - 210.0	53-1206-03	53-1226-03
	High Flow	130.0 - 280.0	53-1216-03	53-1236-03
DN250	Low Flow	190.0 - 475.0	53-1207-10	53-1227-10
	High Flow	245.0 - 600.0	53-1217-10	53-1237-10
DN300	Low Flow	190.0 - 475.0	53-1208-10	53-1228-10
	High Flow	245.0 - 600.0	53-1218-10	53-1238-10

Accessories


Frese no.	Product	Type	Suitable for valves	Suitable for actuators
58-8951	Stem heater	24 VAC, 50 W	DN40-DN200	Type-01 to Type-07

Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Frese OPTIMA Compact Low Flow DN50

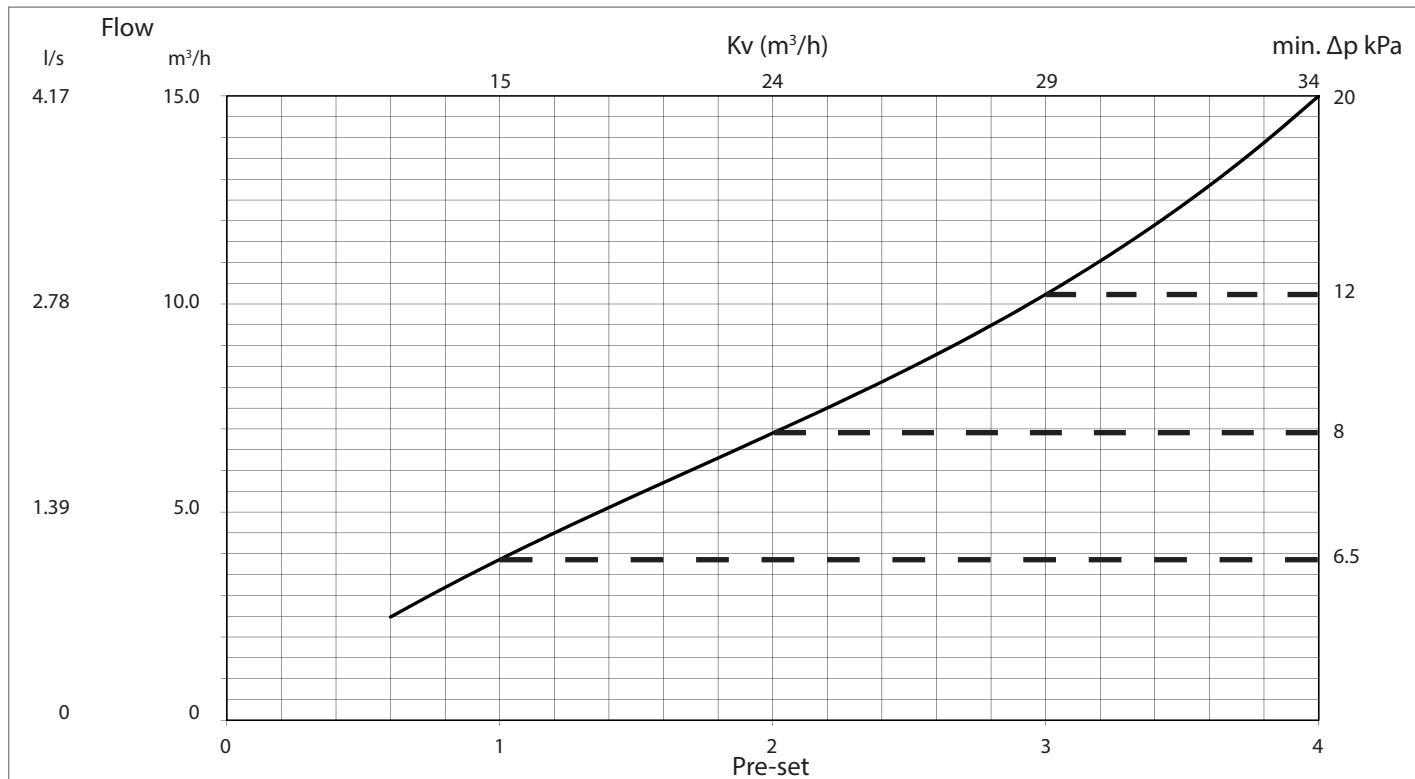


Frese OPTIMA Compact High Flow DN50

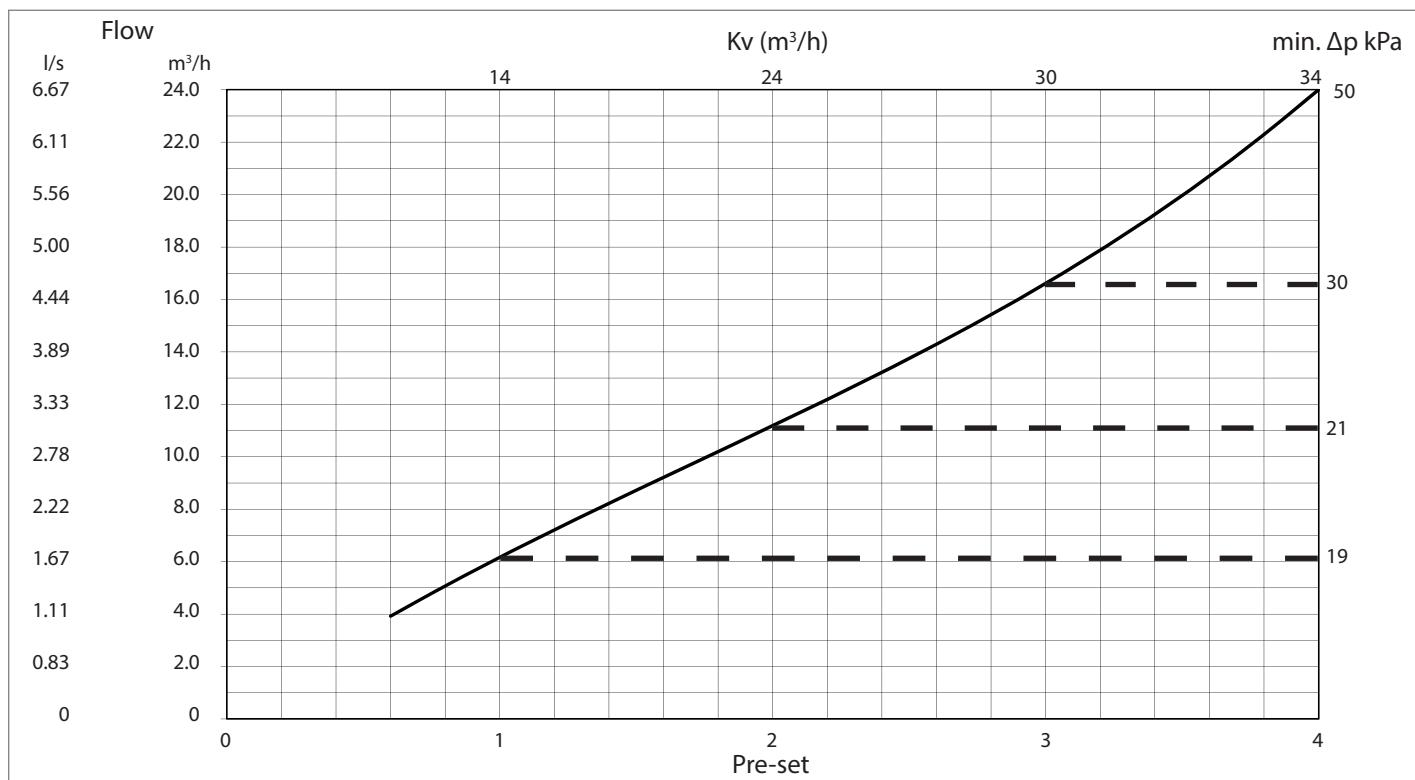


Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Frese OPTIMA Compact Low Flow DN65

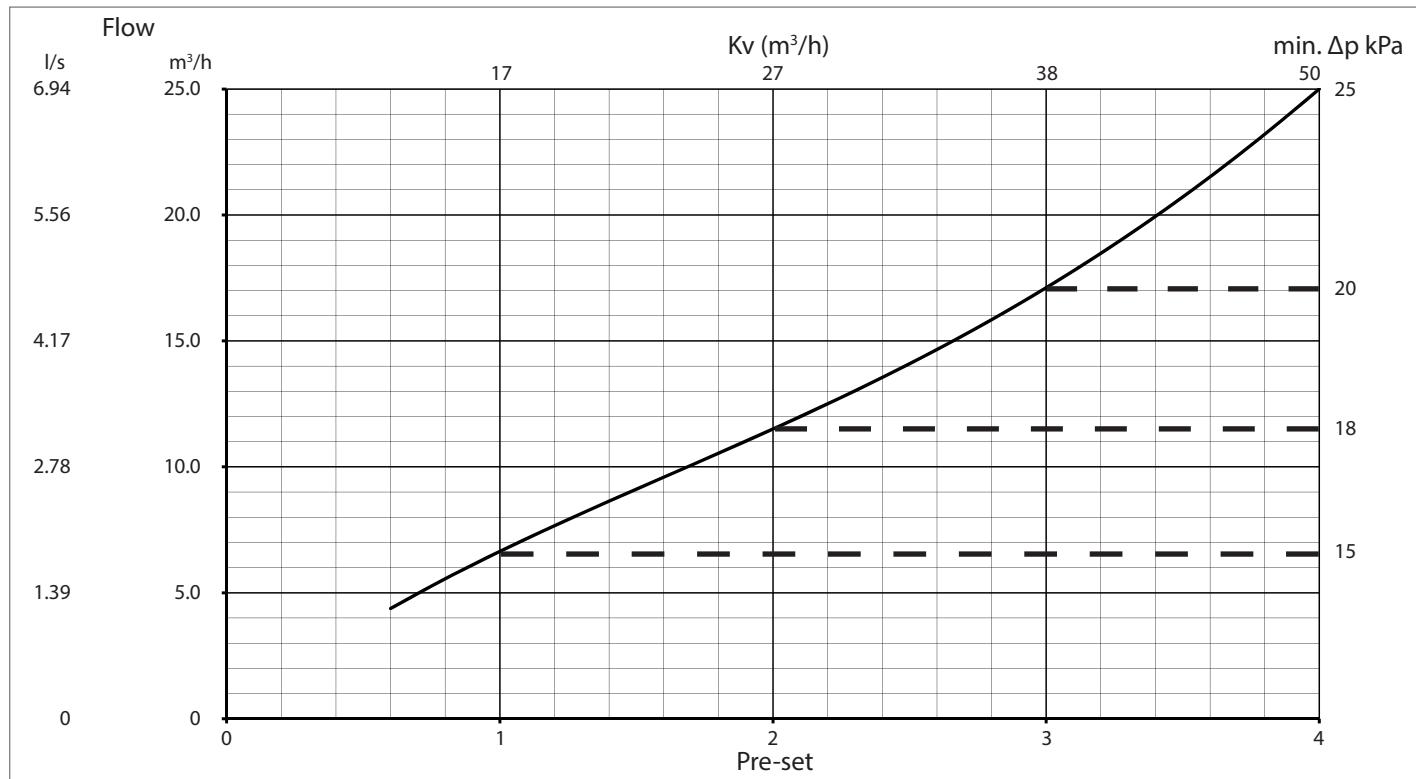


Frese OPTIMA Compact High Flow DN65

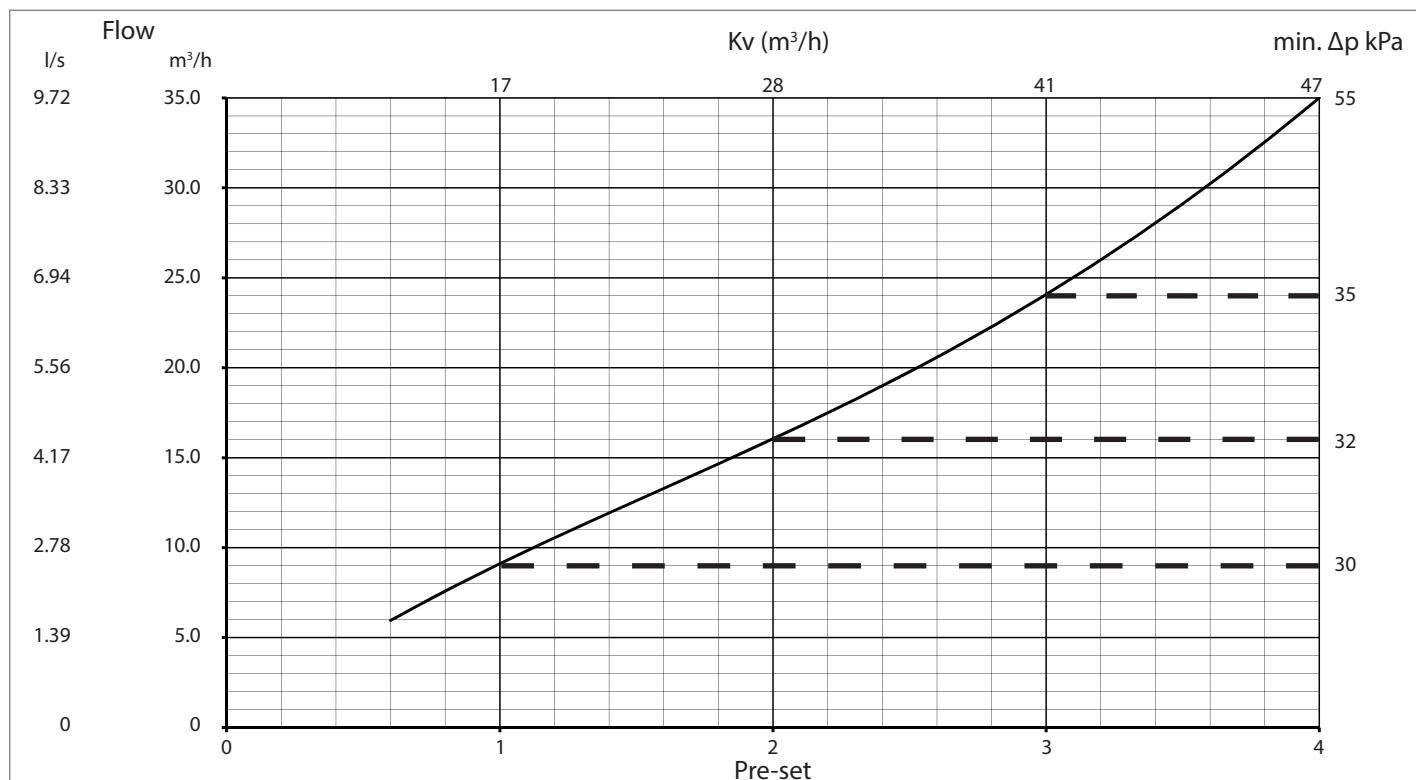


Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Frese OPTIMA Compact Low Flow DN80

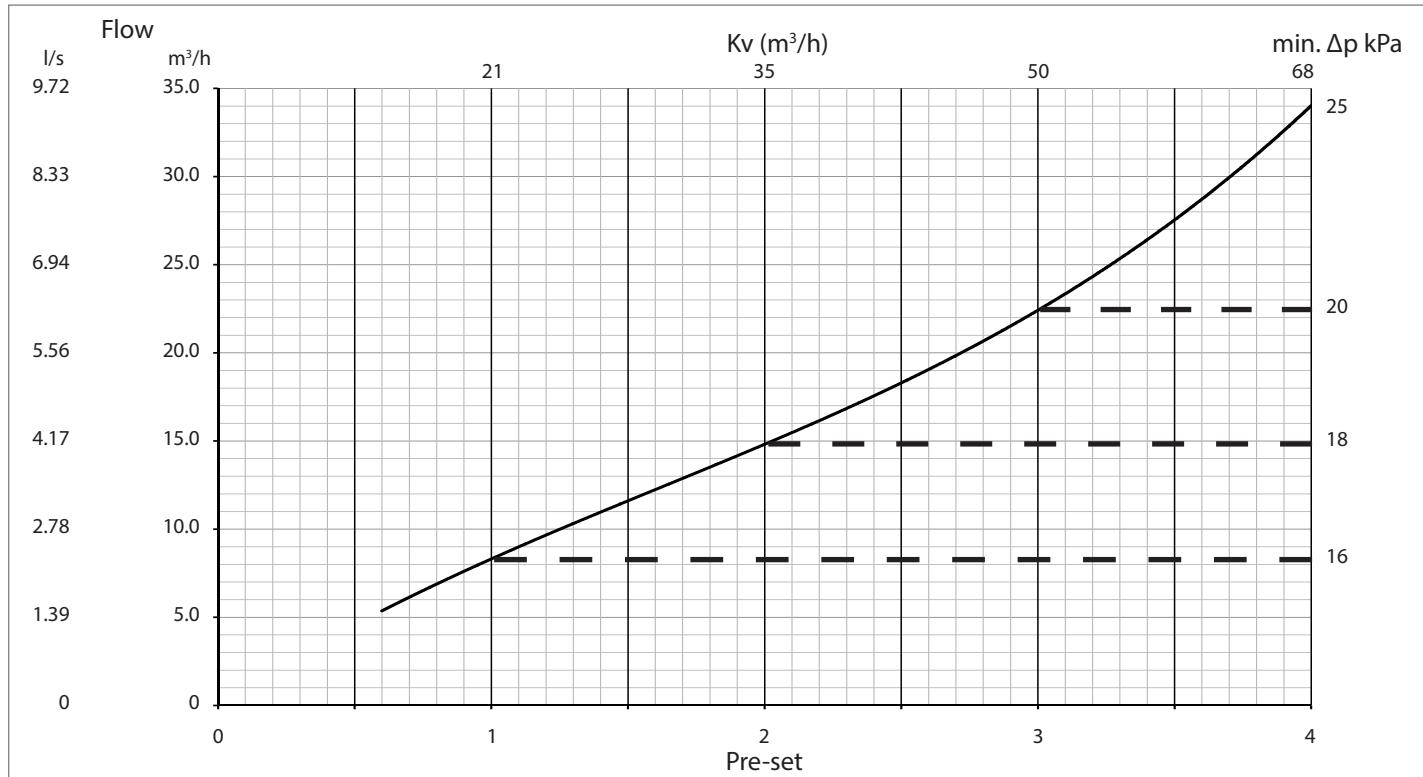


Frese OPTIMA Compact High Flow DN80

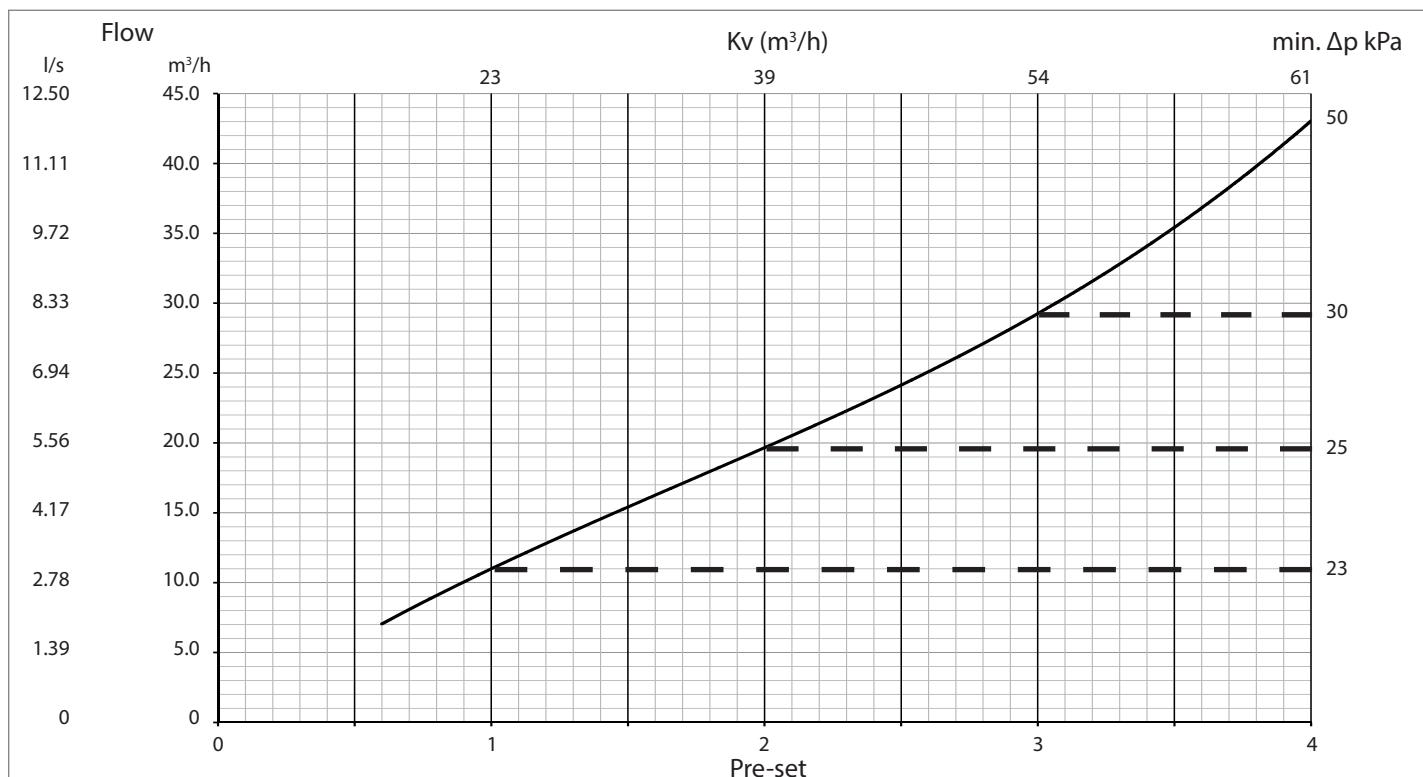


Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Frese OPTIMA Compact Low Flow DN100

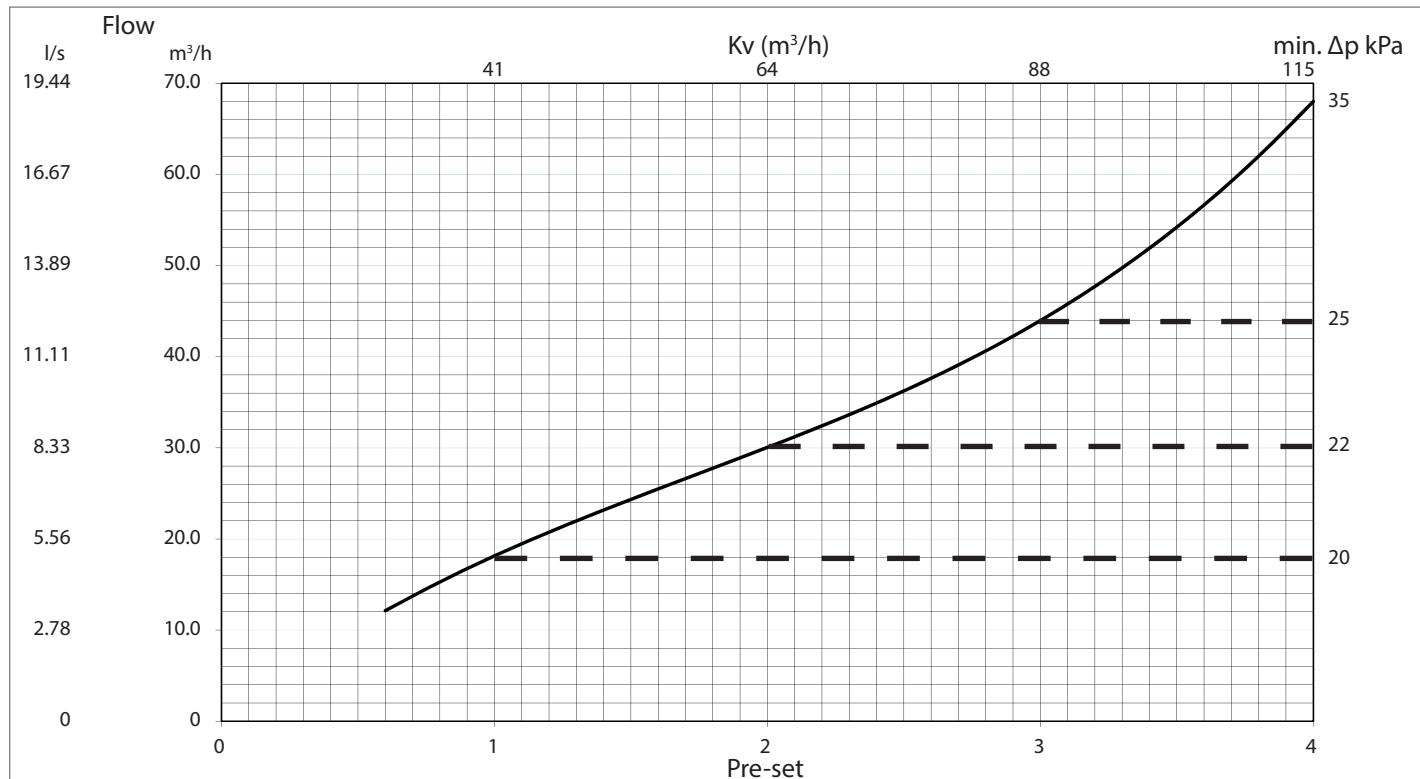


Frese OPTIMA Compact High Flow DN100

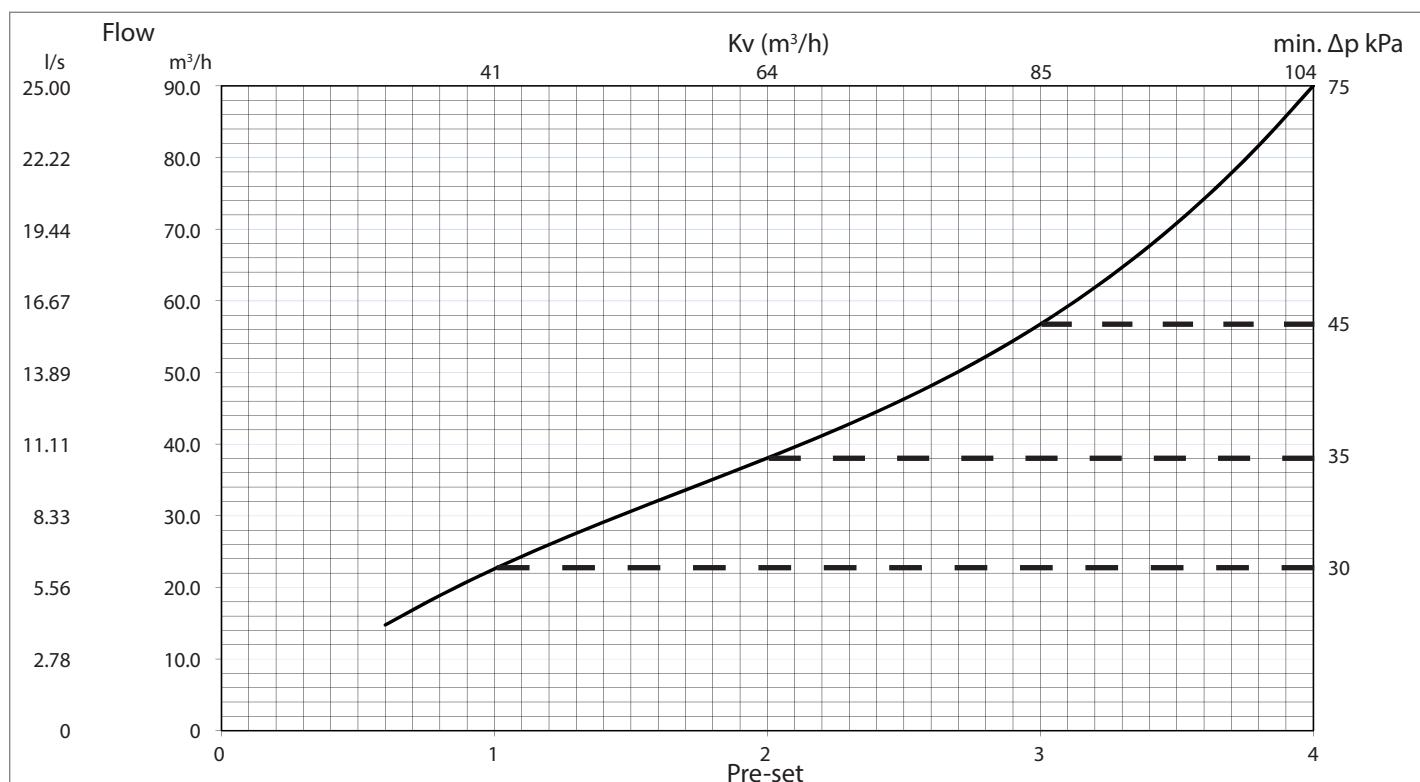


Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Frese OPTIMA Compact Low Flow DN125

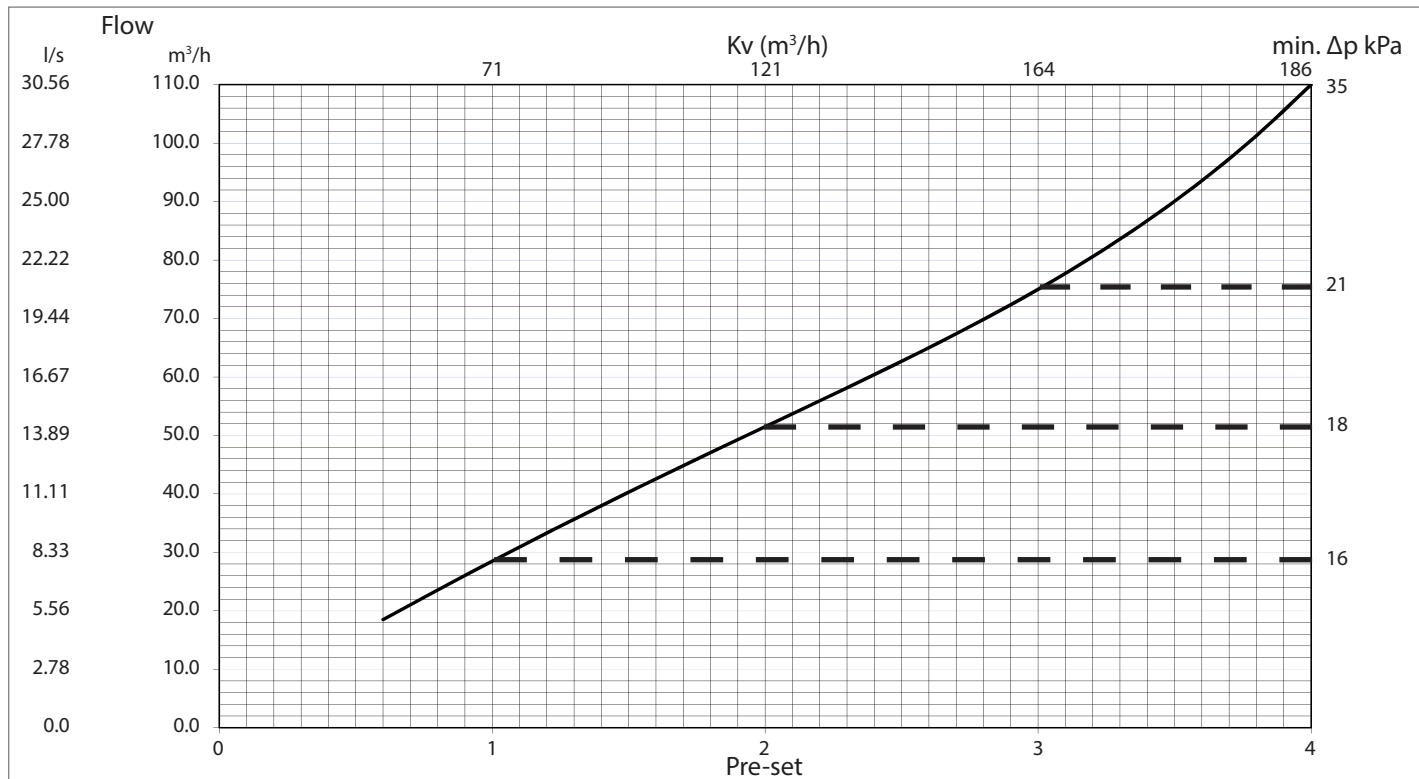


Frese OPTIMA Compact High Flow DN125

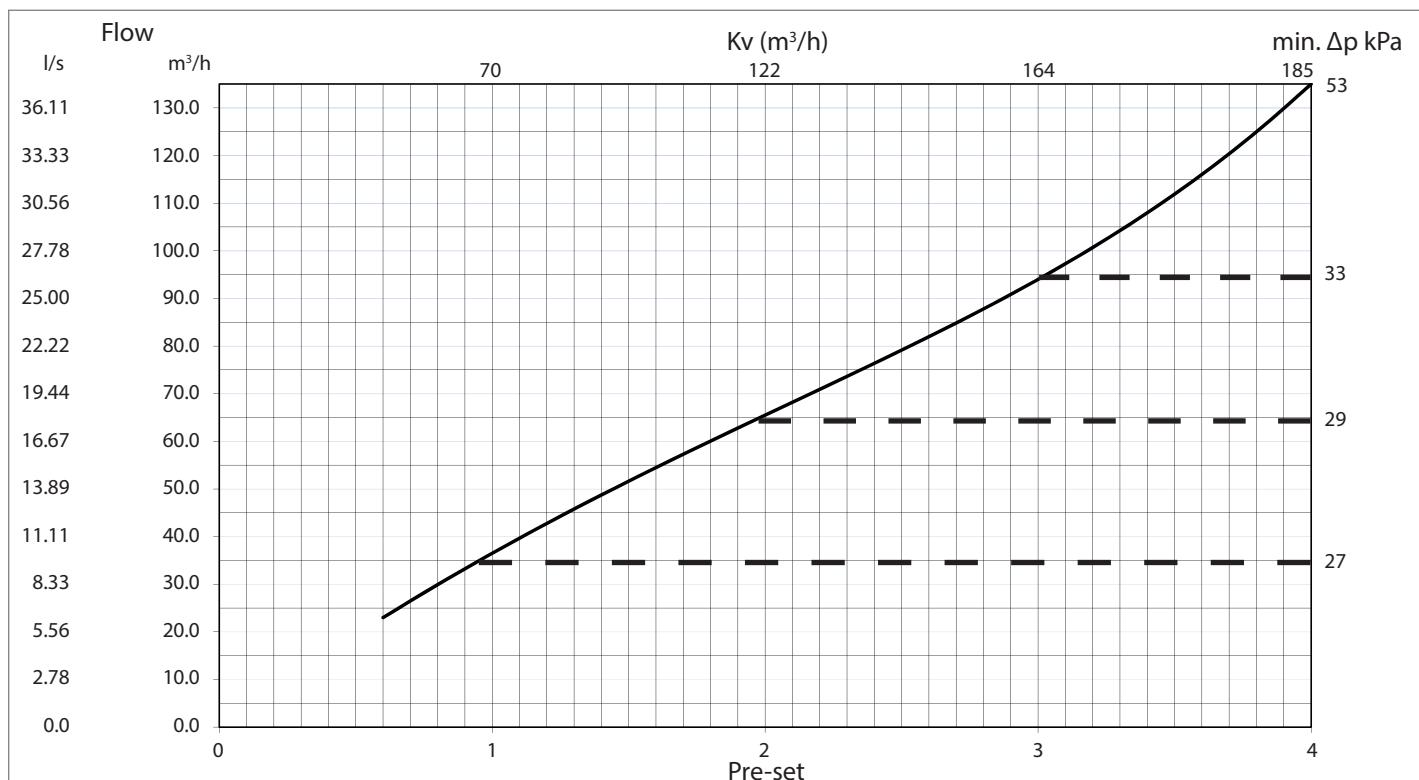


Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Frese OPTIMA Compact Low Flow DN150

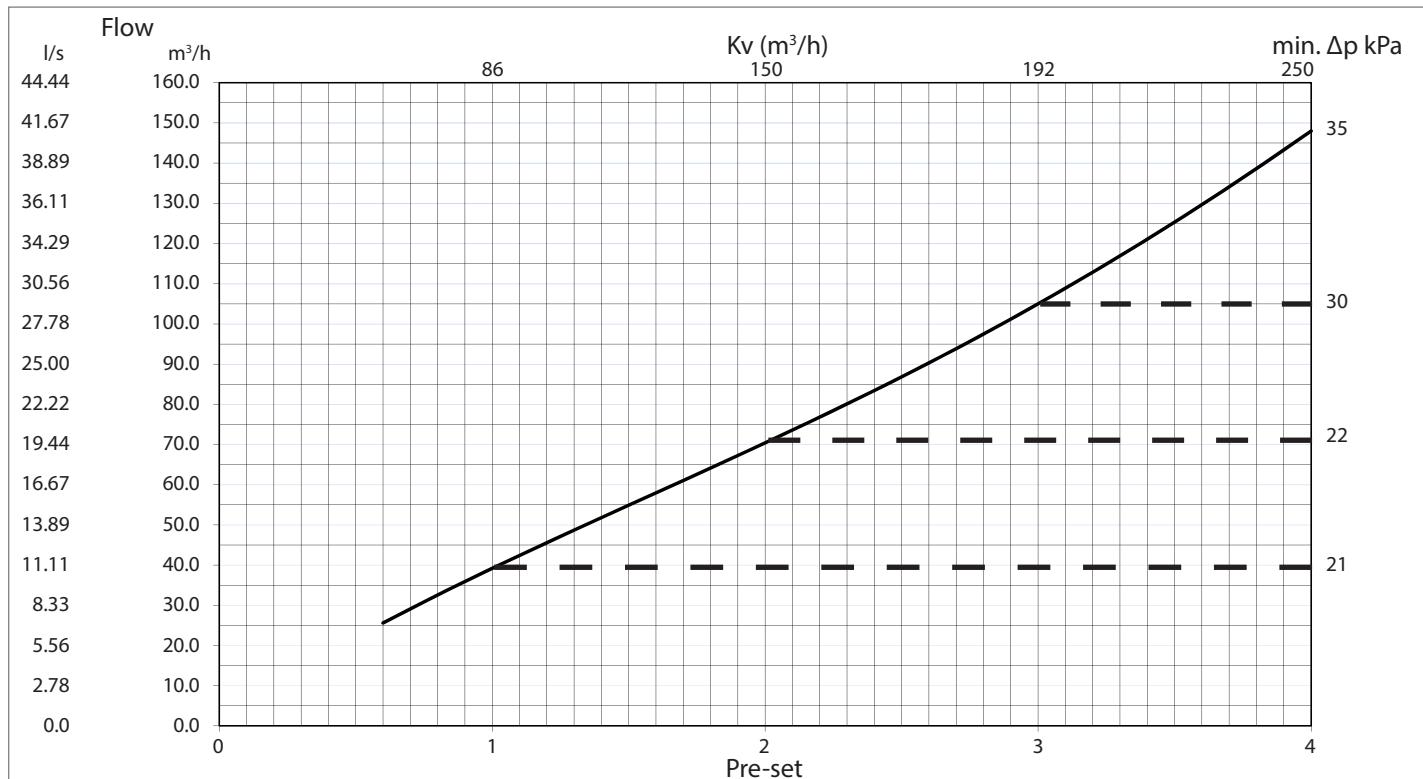


Frese OPTIMA Compact High Flow DN150

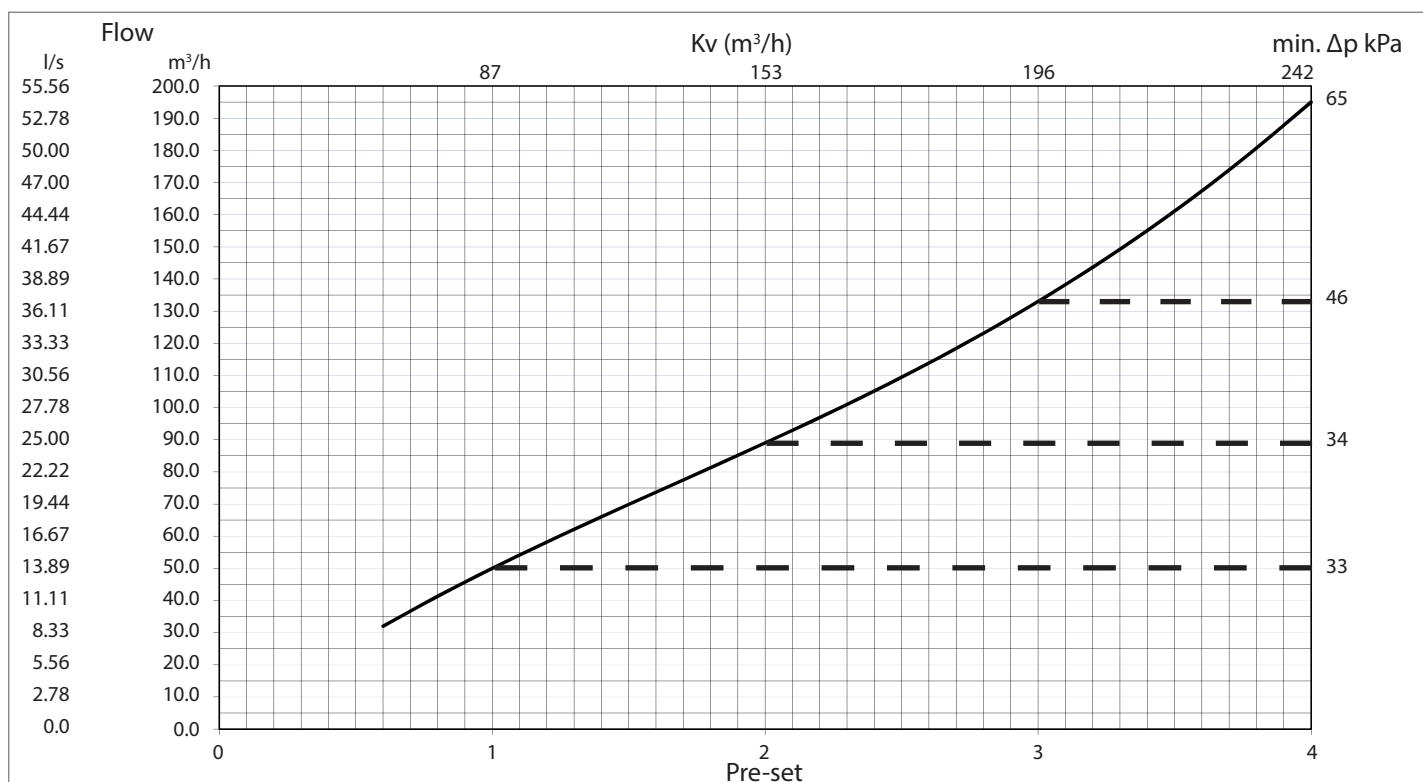


Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Frese OPTIMA Compact Low Flow DN200

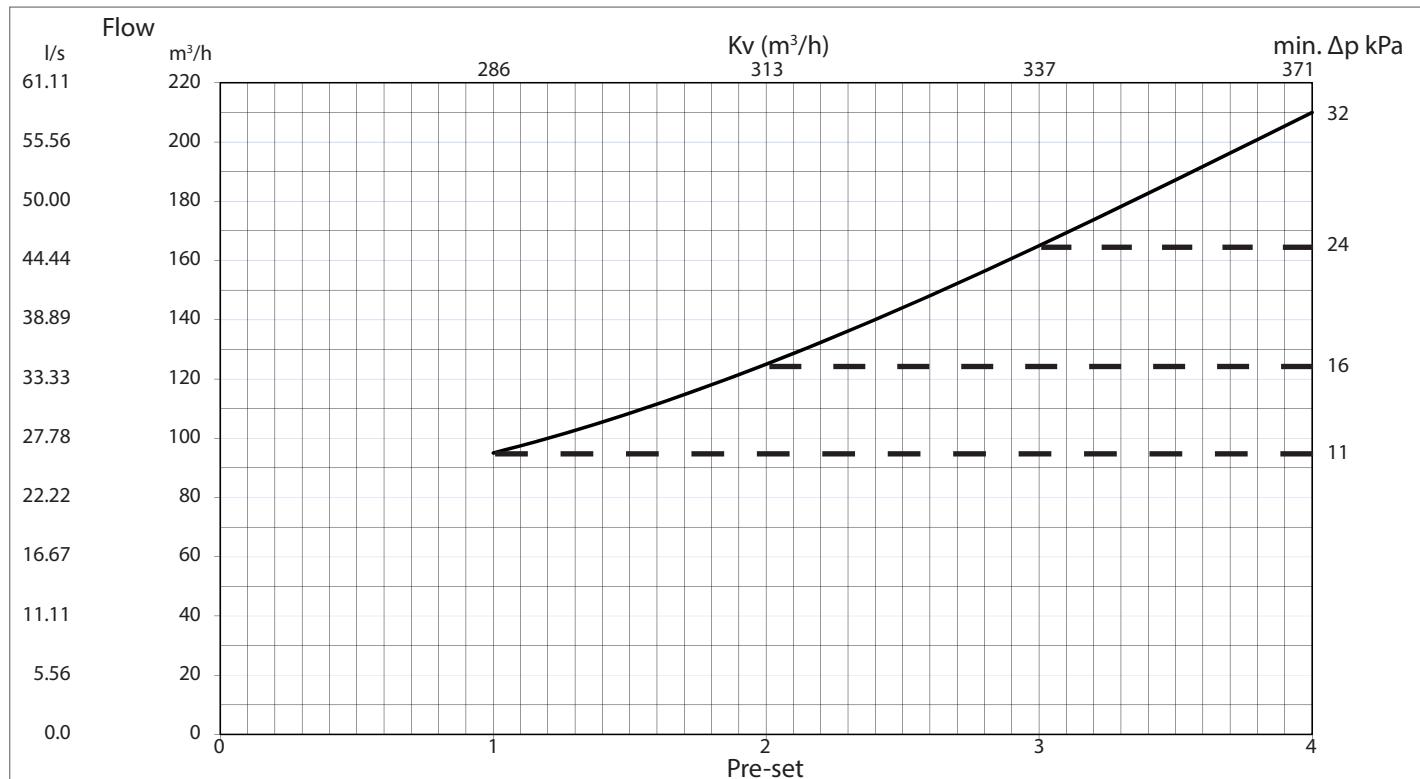


Frese OPTIMA Compact High Flow DN200

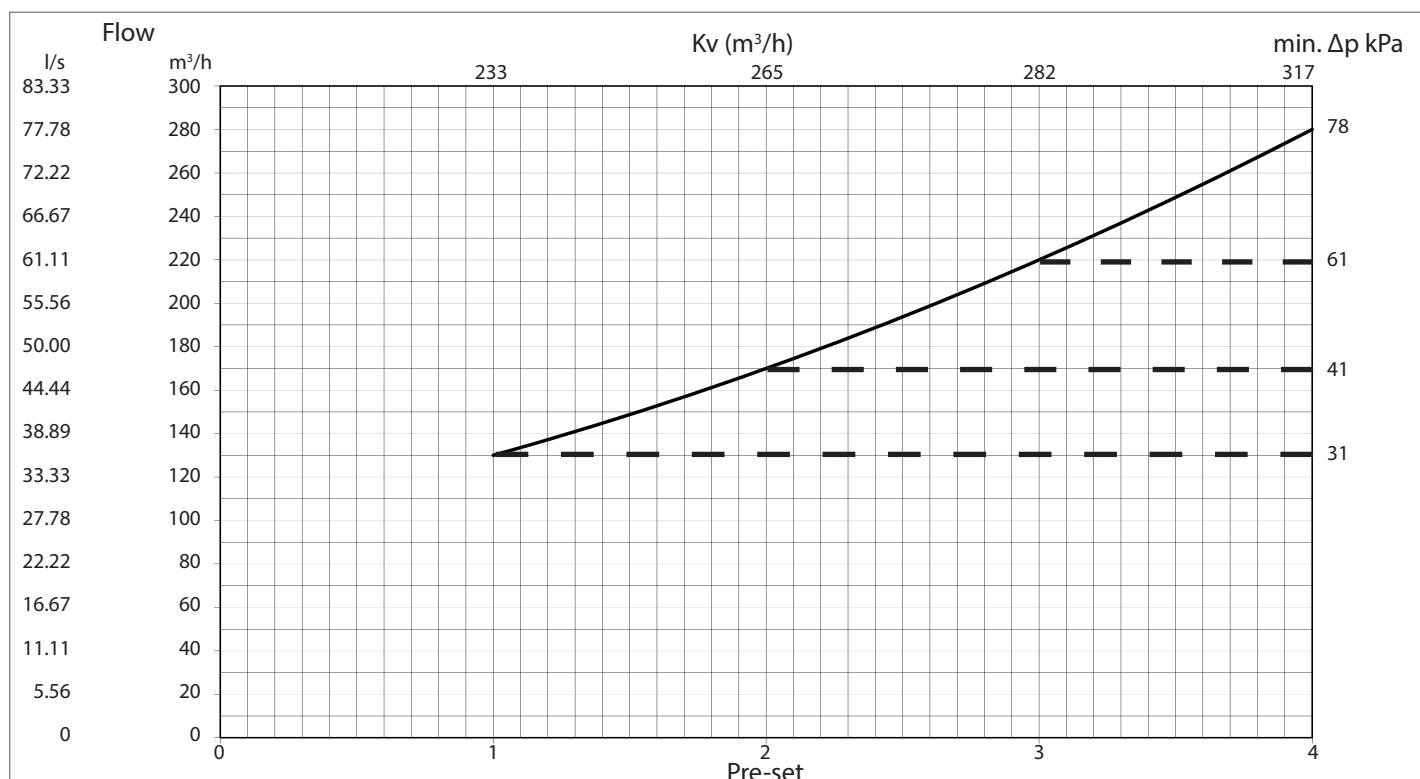


Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Frese OPTIMA Compact Low Flow DN250

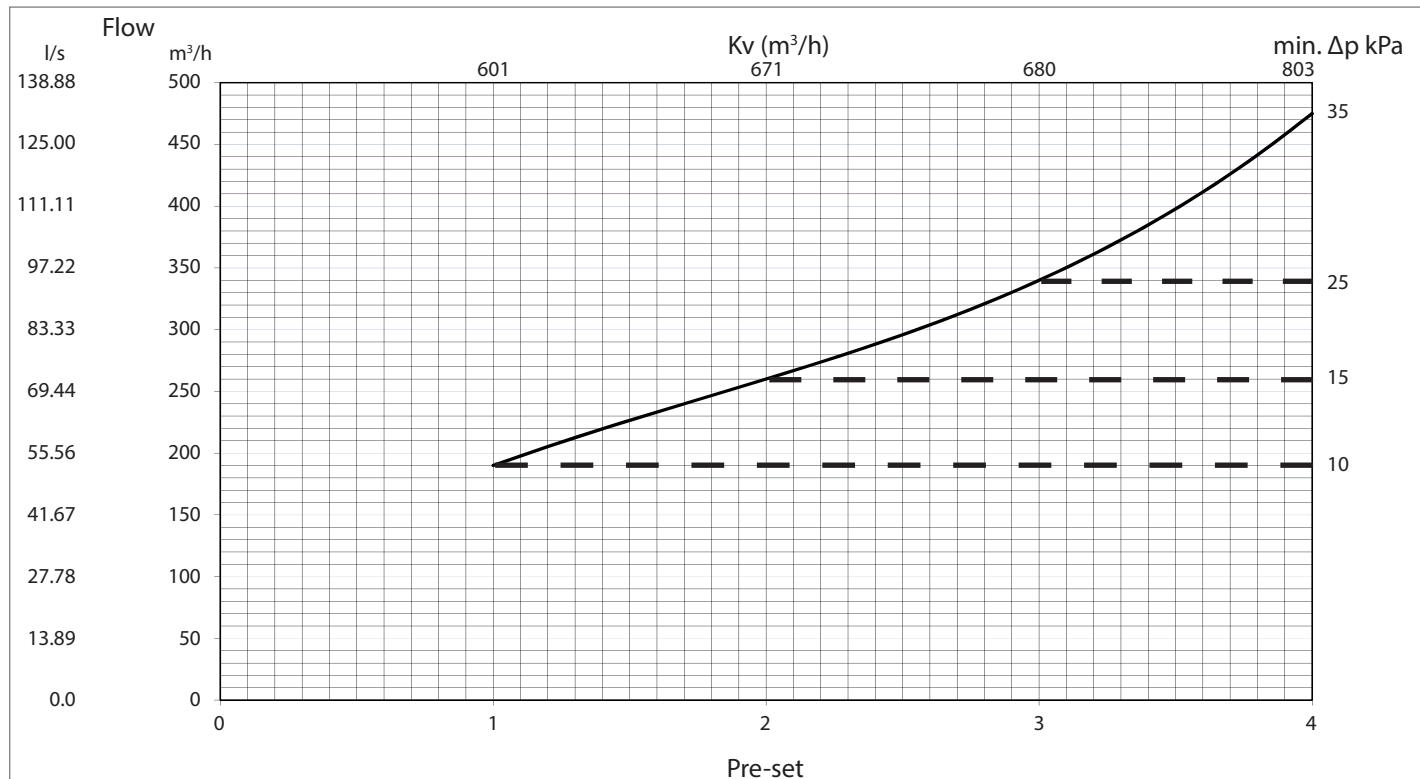


Frese OPTIMA Compact High Flow DN250

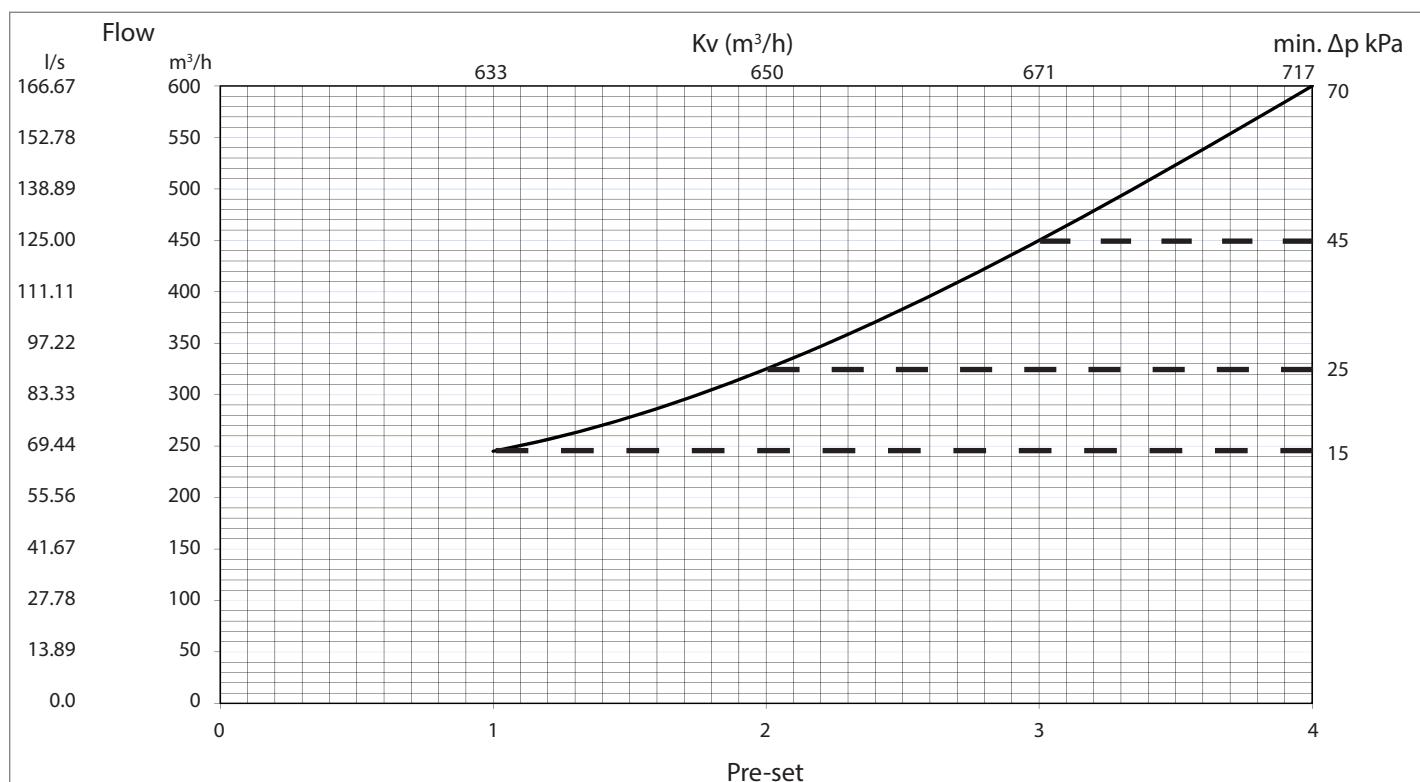


Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Frese OPTIMA Compact Low Flow DN300

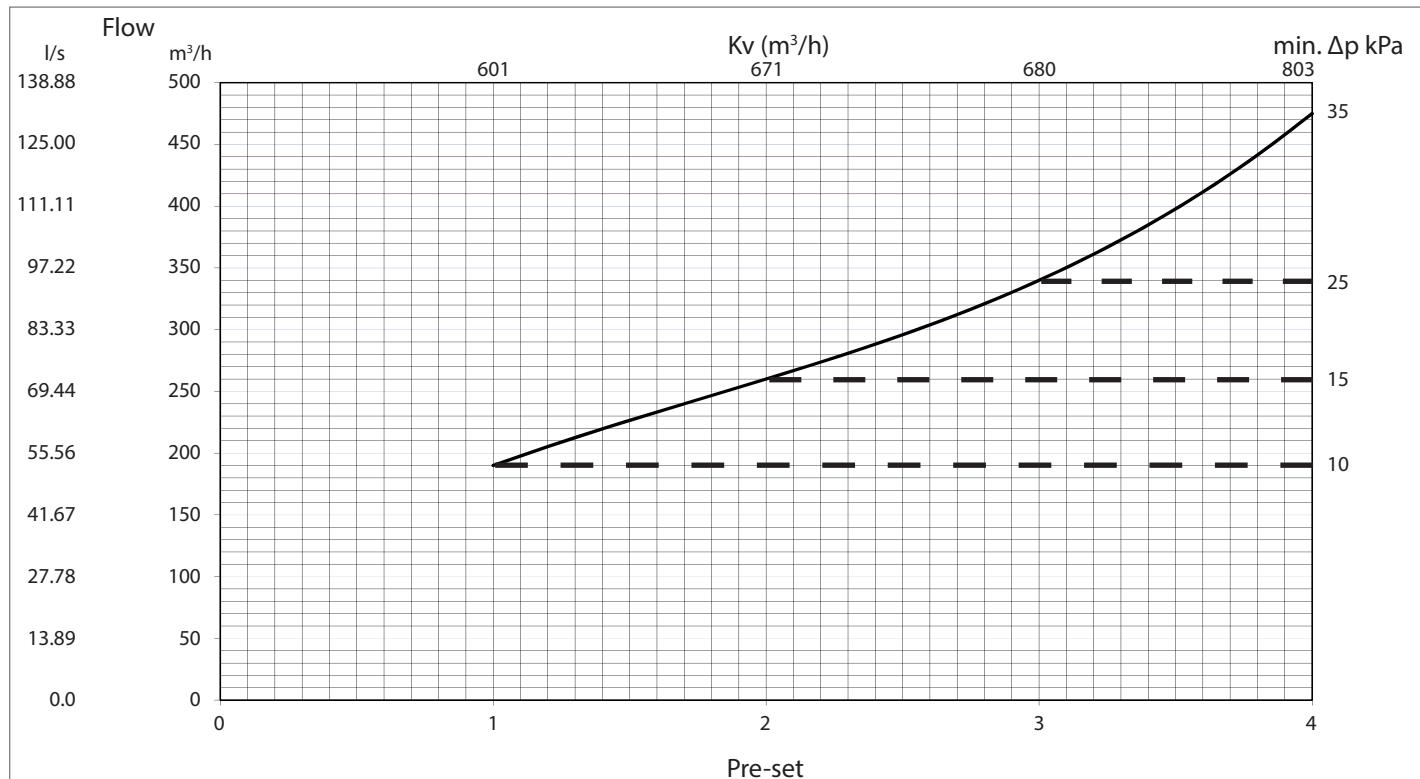

Frese OPTIMA Compact High Flow DN300

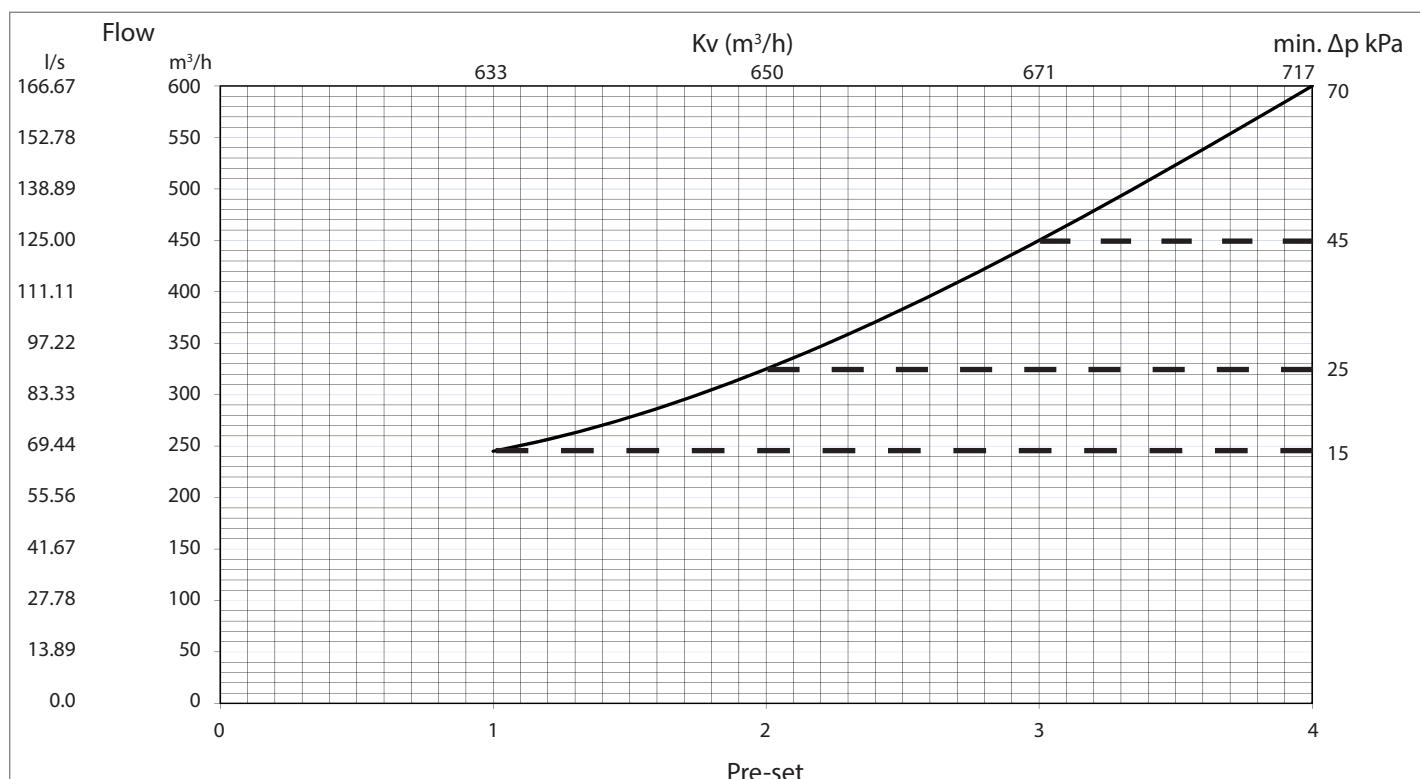

Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Setting and Flow DN50-DN65-DN80

OPTIMA Compact DN50 LF			
Pre-set	Flow m³/h	Flow l/s	Flow gpm
0.6	2.5	0.689	10.92
0.8	3.2	0.887	14.06
1.0	3.9	1.073	17.01
1.2	4.5	1.250	19.81
1.4	5.1	1.420	22.51
1.6	5.7	1.586	25.14
1.8	6.3	1.750	27.74
2.0	6.9	1.916	30.36
2.2	7.5	2.084	33.03
2.4	8.1	2.258	35.79
2.6	8.8	2.441	38.69
2.8	9.5	2.635	41.76
3.0	10.2	2.842	45.04
3.2	11.0	3.065	48.57
3.4	11.9	3.306	52.40
3.6	12.8	3.569	56.56
3.8	13.9	3.855	61.09
4.0	15.0	4.167	66.03

OPTIMA Compact DN50 HF		
Flow m³/h	Flow l/s	Flow gpm
3.9	1.090	17.28
5.1	1.410	22.34
6.2	1.713	27.15
7.2	2.003	31.75
8.2	2.285	36.21
9.2	2.560	40.57
10.2	2.833	44.90
11.2	3.107	49.24
12.2	3.386	53.66
13.2	3.672	58.20
14.3	3.970	62.92
15.4	4.283	67.88
16.6	4.614	73.13
17.9	4.967	78.72
19.2	5.346	84.72
20.7	5.753	91.17
22.3	6.192	98.13
24.0	6.667	105.65

OPTIMA Compact DN65 LF			
Pre-set	Flow m³/h	Flow l/s	Flow gpm
0.6	4.4	1.216	19.27
0.8	5.6	1.544	24.47
1.0	6.6	1.846	29.25
1.2	7.7	2.129	33.73
1.4	8.6	2.399	38.02
1.6	9.6	2.663	42.21
1.8	10.5	2.927	46.39
2.0	11.5	3.195	50.63
2.2	12.5	3.472	55.03
2.4	13.5	3.763	59.64
2.6	14.7	4.071	64.52
2.8	15.8	4.400	69.73
3.0	17.1	4.753	75.32
3.2	18.5	5.132	81.33
3.4	19.9	5.539	87.78
3.6	21.5	5.976	94.71
3.8	23.2	6.445	102.13
4.0	25.0	6.945	110.06

OPTIMA Compact DN65 HF		
Flow m³/h	Flow l/s	Flow gpm
6.0	1.654	26.21
7.6	2.108	33.41
9.1	2.530	40.09
10.5	2.929	46.42
11.9	3.314	52.52
13.3	3.692	58.52
14.7	4.072	64.53
16.0	4.458	70.66
17.5	4.858	76.99
19.0	5.277	83.63
20.6	5.719	90.63
22.3	6.188	98.07
24.1	6.688	105.99
26.0	7.222	114.45
28.0	7.791	123.47
30.2	8.397	133.08
32.5	9.042	143.29
35.0	9.724	154.11

Frese OPTIMA Compact DN80 LF			
Pre-set	Flow m³/h	Flow l/s	Flow gpm
0.6	5.3	1.484	23.53
0.8	6.9	1.906	30.21
1.0	8.3	2.301	36.48
1.2	9.6	2.677	42.44
1.4	10.9	3.040	48.19
1.6	12.2	3.396	53.83
1.8	13.5	3.751	59.46
2.0	14.8	4.113	65.19
2.2	16.2	4.486	71.11
2.4	17.6	4.878	77.32
2.6	19.1	5.295	83.93
2.8	20.7	5.744	91.04
3.0	22.4	6.230	98.74
3.2	24.3	6.760	107.15
3.4	26.4	7.341	116.35
3.6	28.7	7.978	126.46
3.8	31.2	8.679	137.57
4.0	34.0	9.450	149.78

Frese OPTIMA Compact DN80 HF		
Flow m³/h	Flow l/s	Flow gpm
7.0	1.951	30.92
9.0	2.513	39.83
11.0	3.043	48.23
12.8	3.547	56.23
14.5	4.034	63.94
16.2	4.510	71.48
18.0	4.982	78.96
19.6	5.457	86.49
21.4	5.943	94.19
23.2	6.446	102.17
25.1	6.973	110.53
27.1	7.533	119.40
29.3	8.131	128.88
31.6	8.775	139.09
34.1	9.473	150.15
36.8	10.230	162.15
39.8	11.055	175.22
43.0	11.954	189.47

Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Setting and Flow DN100-DN125-DN150

OPTIMA Compact DN100 LF			
Pre-set	Flow m³/h	Flow l/s	Flow gpm
0.6	12.1	3.369	53.41
0.8	15.3	4.247	67.32
1.0	18.1	5.040	79.88
1.2	20.8	5.764	91.36
1.4	23.2	6.439	102.06
1.6	25.5	7.083	112.26
1.8	27.8	7.713	122.24
2.0	30.0	8.347	132.30
2.2	32.4	9.004	142.71
2.4	34.9	9.701	153.75
2.6	37.6	10.456	165.73
2.8	40.6	11.288	178.91
3.0	44.0	12.214	193.59
3.2	47.7	13.253	210.05
3.4	51.9	14.422	228.58
3.6	56.7	15.739	249.46
3.8	62.0	17.222	272.98
4.0	68.0	18.891	299.41

OPTIMA Compact DN100 HF		
Flow m³/h	Flow l/s	Flow gpm
14.8	4.100	64.99
18.9	5.246	83.15
22.6	6.276	99.48
26.0	7.216	114.37
29.1	8.090	128.22
32.1	8.924	141.44
35.1	9.743	154.42
38.1	10.572	167.57
41.2	11.438	181.29
44.5	12.364	195.97
48.2	13.377	212.03
52.2	14.501	229.85
56.7	15.763	249.84
61.9	17.186	272.41
67.7	18.798	297.94
74.2	20.622	326.85
81.7	22.684	359.54
90.0	25.009	396.40

OPTIMA Compact DN125 LF			
Pre-set	Flow m³/h	Flow l/s	Flow gpm
0.6	18.5	5.139	81.45
0.8	23.6	6.543	103.71
1.0	28.5	7.917	125.48
1.2	33.3	9.255	146.69
1.4	38.0	10.558	167.35
1.6	42.6	11.830	187.50
1.8	47.1	13.075	207.24
2.0	51.5	14.305	226.74
2.2	55.9	15.534	246.21
2.4	60.4	16.778	265.94
2.6	65.0	18.059	286.24
2.8	69.8	19.402	307.51
3.0	75.0	20.833	330.20
3.2	80.6	22.385	354.80
3.4	86.7	24.092	381.86
3.6	93.6	25.994	412.01
3.8	101.3	28.133	445.91
4.0	110.0	30.555	484.29

OPTIMA Compact DN125 HF		
Flow m³/h	Flow l/s	Flow gpm
23.0	6.389	101.26
29.9	8.312	131.74
36.5	10.139	160.70
42.8	11.878	188.26
48.7	13.539	214.59
54.5	15.134	239.88
60.0	16.680	264.38
65.5	18.194	288.38
70.9	19.697	312.20
76.4	21.213	336.23
82.0	22.767	360.86
87.8	24.389	386.57
94.0	26.111	413.86
100.7	27.966	443.26
108.0	29.991	475.36
116.0	32.226	510.79
125.0	34.714	550.22
135.0	37.500	594.37

OPTIMA Compact DN150 LF			
Pre-set	Flow m³/h	Flow l/s	Flow gpm
0.6	25.6	7.111	112.71
0.8	32.6	9.049	143.42
1.0	39.2	10.889	172.59
1.2	45.6	12.660	200.66
1.4	51.8	14.389	228.06
1.6	58.0	16.100	255.18
1.8	64.1	17.815	282.37
2.0	70.4	19.555	309.95
2.2	76.8	21.337	338.20
2.4	83.4	23.177	367.36
2.6	90.3	25.088	397.65
2.8	97.5	27.081	429.24
3.0	105.0	29.166	462.28
3.2	112.9	31.348	496.87
3.4	121.1	33.632	533.07
3.6	129.7	36.021	570.94
3.8	138.7	38.515	610.46
4.0	148.0	41.110	651.59

OPTIMA Compact DN150 HF		
Flow m³/h	Flow l/s	Flow gpm
32.0	8.889	140.89
41.3	11.480	181.96
50.0	13.889	220.14
58.2	16.162	256.16
66.0	18.341	290.70
73.7	20.468	324.42
81.3	22.583	357.94
89.0	24.723	391.86
96.9	26.922	426.71
105.2	29.214	463.04
113.9	31.630	501.33
123.1	34.198	542.04
133.0	36.945	585.59
143.6	39.897	632.37
155.1	43.076	682.75
167.4	46.502	737.05
180.7	50.194	795.57
195.0	54.168	858.56

Frese OPTIMA Compact DN50-DN300 - pressure independent balancing & control valve

Setting and Flow DN200-DN250-DN300

OPTIMA Compact DN200 LF			
Pre-set	Flow m³/h	Flow l/s	Flow gpm
1.0	95	26.39	418
1.2	100	27.77	440
1.4	105	29.30	464
1.6	112	30.98	491
1.8	118	32.79	520
2.0	125	34.72	550
2.2	132	36.77	583
2.4	140	38.91	617
2.6	148	41.14	652
2.8	156	43.46	689
3.0	165	45.83	726
3.2	174	48.27	765
3.4	183	50.74	804
3.6	192	53.26	844
3.8	201	55.79	884
4.0	210	58.33	925

OPTIMA Compact DN200 HF		
Flow m³/h	Flow l/s	Flow gpm
130	36.11	572
137	38.11	604
145	40.22	638
153	42.44	673
161	44.78	710
170	47.22	748
179	49.78	789
189	52.44	831
199	55.22	875
209	58.11	921
220	61.11	969
231	64.22	1018
243	67.44	1069
255	70.78	1122
267	74.22	1176
280	77.78	1233

OPTIMA Compact DN250 LF			
Pre-set	Flow m³/h	Flow l/s	Flow gpm
1.0	190	52.778	837
1.2	205	57.044	904
1.4	220	61.022	967
1.6	233	64.811	1027
1.8	247	68.511	1086
2.0	260	72.222	1145
2.2	274	76.044	1205
2.4	288	80.078	1269
2.6	304	84.422	1338
2.8	321	89.178	1413
3.0	340	94.444	1497
3.2	361	100.322	1590
3.4	385	106.911	1695
3.6	412	114.311	1812
3.8	441	122.622	1944
4.0	475	131.944	2091

OPTIMA Compact DN250 HF		
Flow m³/h	Flow l/s	Flow gpm
245	68.055	1079
256	71.233	1129
270	75.089	1190
286	79.578	1261
305	84.655	1342
325	90.278	1431
347	96.400	1528
371	102.978	1632
396	109.967	1743
422	117.322	1860
450	125.000	1981
479	132.956	2107
508	141.144	2237
538	149.522	2370
569	158.045	2505
600	166.667	2642

OPTIMA Compact DN300 LF			
Pre-set	Flow m³/h	Flow l/s	Flow gpm
1.0	190	52.778	837
1.2	205	57.044	904
1.4	220	61.022	967
1.6	233	64.811	1027
1.8	247	68.511	1086
2.0	260	72.222	1145
2.2	274	76.044	1205
2.4	288	80.078	1269
2.6	304	84.422	1338
2.8	321	89.178	1413
3.0	340	94.444	1497
3.2	361	100.322	1590
3.4	385	106.911	1695
3.6	412	114.311	1812
3.8	441	122.622	1944
4.0	475	131.944	2091

OPTIMA Compact DN300 HF		
Flow m³/h	Flow l/s	Flow gpm
245	68.055	1079
256	71.233	1129
270	75.089	1190
286	79.578	1261
305	84.655	1342
325	90.278	1431
347	96.400	1528
371	102.978	1632
396	109.967	1743
422	117.322	1860
450	125.000	1981
479	132.956	2107
508	141.144	2237
538	149.522	2370
569	158.045	2505
600	166.667	2642

Frese OPTIMA Compact DN50-DN300

- pressure independent balancing & control valve

Documentation formula

Pump type	Regulation mode	Set point
Installation		
Signature	Date	

Text for technical specifications

The length of the modulating stroke shall be independent of flow setting. The valve shall have full stroke modulating control at all flow settings and the stroke should not be restricted by the flow setting position.

The modulation and flow setting shall be one combined unit with a linear modulating motion and a rotational flow setting motion.

The valve characterization shall not be changed at different flow settings.

The combined flow setting and modulating control unit shall be pressure independent.

The Pressure Independent Control Valve shall contain a combined flow setting, differential pressure control and modulating bonnet assembly.

The valve housing shall be GJL-250 or GJS-400.

The valve shall have a spring made of stainless steel, a Diaphragm made of Reinforced EPDM and O-rings made of EPDM.

The valve shall have flange connections according to EN 1092

The valve shall have a maximum operating differential pressure of 800 kPa (8 Bar).

The valve shall have a maximum operating differential pressure of 300 KPa (3 Bar).

R/T plugs shall be available.

The valve shall be capable of closing against a maximum differential pressure of 800 kPa (8 bar) with a leakage rate at maximum 0.01% of max rated volumetric flow and comply to EN1340 Class IV.

Pressure independent control valves must be tested in accordance with the BSRIA document BTS.1 'Test Method for Pressure Independent Control Valves' and manufacturers must be able to provide the test results upon request.

Frese A/S assumes no responsibility for errors, if any, in catalogues, brochures, and other printed matter. Frese A/S reserves the right to modify its products without prior notice, including already ordered products, if this does not alter existing specifications. All registered trademarks in this material are the property of Frese A/S. All rights reserved

Frese A/S
Sorøvej 8
DK- 4200 Slagelse
Tel: +45 58 56 00 00
Fax: +45 58 56 00 91
info@frese.dk