

M9109-xGx-2 Series Electric Non-Spring-Return Actuators Catalog Page

LIT-1900154

2020-04-29

Description

The M9109 Series direct-mount electric actuators operate on AC 24 V power and are available for use with floating or proportional controllers. These non-spring-return actuators are easily installed on a VAV box, a round damper shaft up to 1/2 in. (13 mm) in diameter, or a 3/8 in. (10 mm) square shaft. The M9109 with an M9000-520 linkage can be used to control 2 in. (DN50) VG1000 Series ball valves.

The M9109 models have 80 lb·in (9 N·m) running torque. They have a nominal 60-second travel time for 90° of rotation at 60 Hz (72 seconds at 50 Hz) with a load-independent rotation time. The M9109-xGC-2 models are available with integral auxiliary switches to perform switching functions at any angle within the selected rotation range.

Refer to the *M9109 Series Electric Non-Spring-Return Actuators Product Bulletin (LIT-120112)* for important product application information.



Features

- simple direct coupling reduces installation and commissioning time and improves reliability by eliminating damper linkages Single screw coupling provides three-point shaft gripping
- designed for zone damper and ball valve actuator applications
- small, compact design allows installation in tight-fitting locations
- designed for zone damper and ball valve actuator applications
- floating and proportional control inputs
- 60-second running time at 60 Hz
- long life brushless synchronous drive motor technology provides constant running time independent of load
- robust 80 lb·in (9 N·m) torque rating
- whisper quiet 35 dBA noise rating
- magnetic clutch provides over torque protection over the entire range of rotation
- -4°F to 125°F (-20°C to 52°C) ambient temperature rating
- 100,000 full stroke cycle, 2,500,000 reposition rating
- manual gear release simplifies setup and field adjustments
- 1/2 in. NPT threaded conduit opening meets electrical code requirements and allows the use of flexible armored cable
- position feedback (-GGX models) provides simple, closed-loop control with accurate position sensing
- adjustable rotation stops allow application versatility with 30 to 90° clockwise or counterclockwise rotation

Applications

The M9109 is used to position balancing, control, round, and zone dampers in typical HVAC applications. It can also be used with an M9000-520 linkage to control VG1000 Series ball valves. The M9109 mounts directly on the duct surface, round damper, or small rectangular damper with an anti-rotation bracket and two sheet metal screws (included). Additional linkages or couplers are not required. For more information, refer to the *M9109 Series Electric Non-Spring-Return Actuators Installation Instructions (Part No. 34-636-1190)*.

Repair information

If the M9109-xGx-2 Series Electric Actuator fails to operate within its specifications, replace the unit. For a replacement actuator, contact the nearest Johnson Controls® representative.


Selection chart

Code number	Control type	Torque / timing / voltage	Auxiliary switches	Comments
M9109-AGA-2 ¹	Floating	80 lb·in (9 N·m)	None	
M9109-AGC-2		60 seconds at 60 Hz	2-SPDT	
M9109-AGC-2	DC 0(2) to 10 V	AC 24 V 50/60 Hz	None	DC 0(2) to 10 V feedback
M9109-GGC-2	DC 0(4) to 20 mA proportional		2-SPDT	


¹ To avoid excessive wear or drive time on the motor for the -AGx models, use a controller and/or software that provides a time-out function to remove the signal at the end of rotation (stall). The -GGx models have an auto shutoff to avoid excessive wear or drive time on the motor.

Accessories

Code number	Description
DMPR-KC003	Square head blade pin extension without bracket
DMPR-KC010	Adjustable blade position indicator switch kit with total switching load limited to 2,000 VA for the following applications: Pilot duty: AC 24 V, 50 VA; AC 125/250/277 V, 125 VA Motor load: AC 125/250/277 V, 1/3 hp Resistive load: AC 125 V, 11 A; AC 250 V, 8 A; AC 277 V, 7 A (all maximum values)
DMPR-KC011	Hex head blade pin extension without bracket
DMPR-KC012	Hex head blade pin extension with bracket
DMPR-KC213	Damper jackshaft 1/2 in. diameter, 1 panel
DMPR-KC214	Damper jackshaft 1/2 in. diameter, 2 panel
M9000-105	Pluggable 3-terminal block
M9000-106	Pluggable 4-terminal block
M9000-160	Replacement anti-rotation bracket for M9106 and M9109 Series actuators
M9000-520	Valve linkage kit for field mounting an M9109 actuator to a 2 in. (DN50) VG1000 Series ball valve

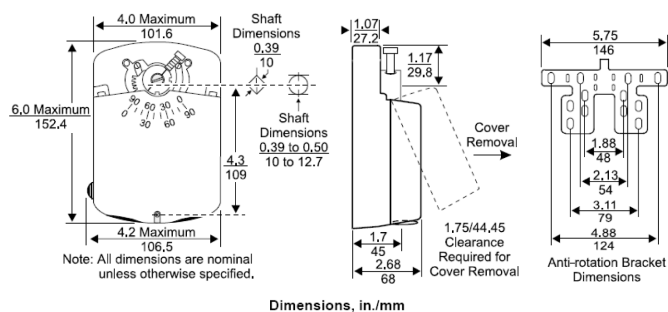

Technical specifications

M9109-xGx-2 Series Electric Non-Spring-Return Actuators		
Power requirement		AGx: AC 20 to 30 V at 50/60 Hz, 2.5 VA supply, Class 2
		GGx: AC 20 to 30 V at 50/60 Hz, 3.2 VA supply, Class 2
Control type		AGx: floating
		GGx: DC 0(2) to 10 V or DC 0(4) to 20 mA proportional
Input signal		AGx: AC 20 to 30 V at 50/60 Hz
		GGx: DC 0(2) to 10 V or DC 0(4) to 20 mA
Input signal adjustments:		AGx: CW and COM terminals, CW rotation; CCW and COM terminals, CCW rotation
		GGx (voltage input or current input):
		Jumper selectable: DC 0(2) to 10 V or DC 0(4) to 20 mA
		Factory setting: DC 0 to 10 V, CW rotation with signal increase Action is jumper selectable direct (CW) or reverse (CCW) with signal increase.
Input impedance		AGx: 200 ohms, nominal
		GGx: voltage input, 150,000 ohms; current input, 500 ohms
Feedback signal		AGF: 10,000 ohm potentiometer, 1 W
		GGx: DC 0 to 10 V or DC 2 to 10 V for 90° (10 VDC at 1 mA);
		Corresponds to input signal span selection
Auxiliary switch rating		xGC: two single-pole, double-throw (SPDT) switches rated at AC 24 V, 1.5 A inductive, 3.0 A resistive, 35 VA maximum per switch, Class 2
Torque rating		80 lb·in (9 N·m)
Cycle life		100,000 full cycles; 2,500,000 repositions rated at 80 lb·in (9 N·m)
Audible noise rating		35 dBA maximum at 39.4 in. (1 m)
Rotation range		Adjustable from 30° to 90°, CW or CCW
Rotation time		60 seconds at 60 Hz and 72 seconds at 50 Hz for 90°
Electrical connection		1/4 in. spade terminals (to order optional pluggable terminal blocks, see Accessories)
Mechanical connection		3/8 in. to 1/2 in. (10 mm to 12.7 mm) round shaft or 3/8 in. (10 mm) square shaft
Enclosure rating		NEMA 2, IP32
Ambient operating rating		-4°F to 125°F (-20°C to 52°C); 90% RH maximum, noncondensing
Ambient storage rating		-40°F to 176°F (-40°C to 80°C); 90% RH maximum, noncondensing
Shipping weight		2.4 lb (1.08 kg)
Compliance	United States	UL 873 Listed, File E27734, CCN XAPX
	Canada	CSA C22.2 No. 139 Certified, File LR85083, Class 3221 02
	Europe	CE Mark - Johnson Controls declares that this product is in compliance with the essential requirements and other relevant provisions of the EMC Directive 2004/108/EC.

Product warranty

This product is covered by a limited warranty, details of which can be found at www.johnsoncontrols.com/buildingswarranty.

Single point of contact

APAC	Europe	NA/SA
JOHNSON CONTROLS C/O CONTROLS PRODUCT MANAGEMENT NO. 32 CHANGJIJIANG RD NEW DISTRICT WUXI JIANGSU PROVINCE 214028 CHINA	JOHNSON CONTROLS WESTENDHOF 3 45143 ESSEN GERMANY	JOHNSON CONTROLS 507 E MICHIGAN ST MILWAUKEE WI 53202 USA